

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated July 20, 1877. Surveyor General records state:

Set stone 14 x 10 x 6 ins. for 1/4 Section corner. Raised stone mound at corner.

X-17

DIAGRAM

T8S R26E
1/4

S34 | S35

PLS 2645

2014


Description of corner evidence found:

No original evidence found. Corner set by single proportion. See Record Map of Survey No. 2026

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a 4' diameter mound of stone. A magnet in a clear plastic case was deposited at the base of pipe.

Cap is 5" above the mound of stone.

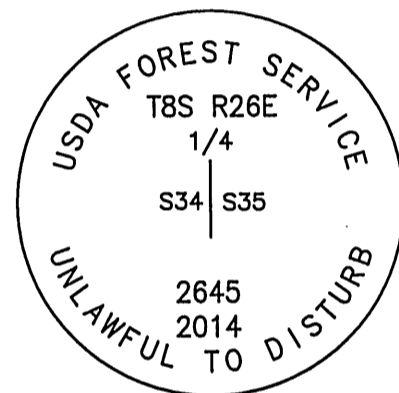

New accessories:

A 8" Juniper scribed "1/4 S35 BT" with aluminum disk stamped "2645" bears N74°E, and is 38.5' to the left side center of tree.

A 4" Juniper scribed "X BT" with aluminum disk stamped "2645" bears S61°W, 58.3'.

A 1/2" x 24" rebar with a 1 1/2" aluminum cap stamped RM1 bears S33°E, 21.5'.

A 4" Alder scribed "X BT" with aluminum disk stamped "2645" bears N65°W, 31.0'.

Geodetic Coordinates (NAD83):

N 44°49'52.1"

W 119°35'33.1"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: August 12, 2014

Declination: 17°

Witnesses: Daniel Lee, Paul Guglielmelli, Robert Flora, and Toribio Quinones

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018