

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None previously established. See Record Map of Survey No. 2026

Y-10

DIAGRAM

SW 1/16 S33

PLS 2645


2014

Description of corner evidence found:

Not Applicable

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in 3' diameter x 1' high mound of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 2 1/2" above the mound of stone.

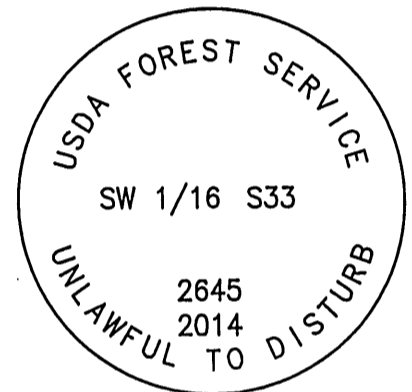

New accessories:

A 18" Juniper scribed "1/16 S33 BT" with a aluminum tag marked "2645" bears N12°E, 9.6'.  
A 3" Juniper scribed "X BT" with a aluminum tag marked "2645" bears N81°W, 40.0'.

Geodetic Coordinates (NAD83):

N 44°49'37.6"

W 119°37'37.8"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver.

Date: August 13, 2014

Declination: 17° E

Witnesses: Daniel Lee and Robert Flora

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Mark A. Lichtenthaler*  
OREGON  
JANUARY 18, 1994  
MARK A. LICHTENTHALER  
2645

EXPIRES 12-31-2018