


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated June 20, 1877. Surveyor General records state:

Set stone 12 x 10 x 6 ins. for standard corner. Raised stone mound at corner.

Z-9

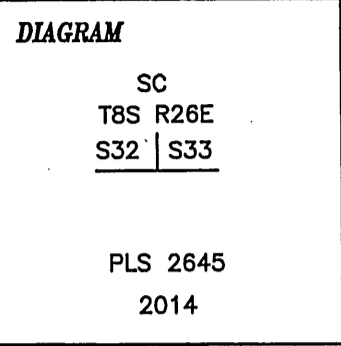

Description of corner evidence found:


Found a 15" X 8" x 8" stone with faint chisel marks, firmly set in a mound of stone 2 1/2' diameter by 1' high. A 16" Juniper with blazes bears S10°W approximately 30'. A Forest Service location poster dated 3-30-45 with the initials EC, GJ, RC & HC was nailed to the Juniper.

Records at the Umatilla National Forest Supervisor's Office contain photographs dated April of 1965. The photos are of the same Juniper, freshly blazed with a weathered location poster attached.

Description of monument and accessories I established to perpetuate the original location of this corner:

See Record Map of Survey No. 2026

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a collar of stone. A magnet in a clear plastic case was deposited at the base of pipe. Cap is 1" above the collar of stone. The original stone was buried along the north side of the pipe.

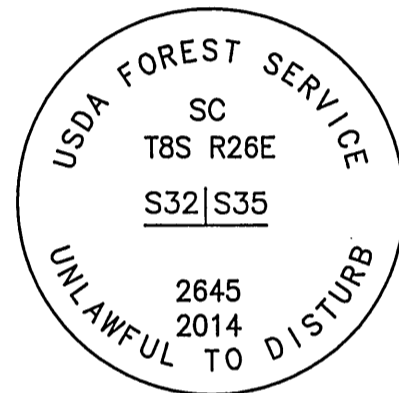

New accessories:

A 14" Juniper scribed "T8S R26E S33 BT" bears N12°E, 76.3'.

A 16" Juniper scribed "T8S R26E S32 BT" bears N76°W, 51.8'.

Both bearing trees have an aluminum washer stamped "2645" affixed at the bottom of the scribe.

Geodetic Coordinates (NAD83):

N 44°49'25.1"

W 119°37'56.2"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: August 22, 2014

Declination: 17° E

Witnesses: Paul Guglielmelli, Daniel Lee, and Toribio Quinones

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JANUARY 18, 1994
MARK A. LICHTENTHALER
2645

EXPIRES 12-31-2018