


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner originally established by Alonzo Gesner, U.S. Deputy Surveyor, under GLO Contract No. 266 dated June 20, 1877. Surveyor General records state:

Set stone 20 x 14 x 12 ins. for 1/4 Section corner.
From which:
A Yellow Pine 6 in. in dia. bears N2°E 94 lks. dist.
A Yellow Pine 28 in. in dia. bears S8°W 50 lks. dist.
A small spring bears S45°W 35 lks. dist.

Z-11

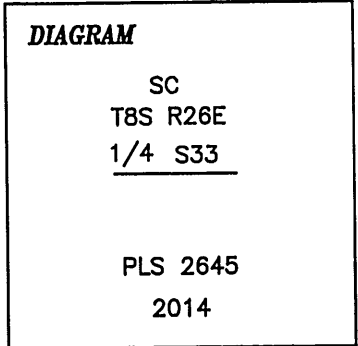


Description of corner evidence found:

No evidence of the stone or bearing trees found. The spring has been developed and corner falls at the southern edge of an old farm field near two cabins.
Monument set by single proportion. See Record Map of Survey No. 2026

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown. A magnet in a clear plastic case was deposited at the base of pipe. Cap is set flush with the ground.

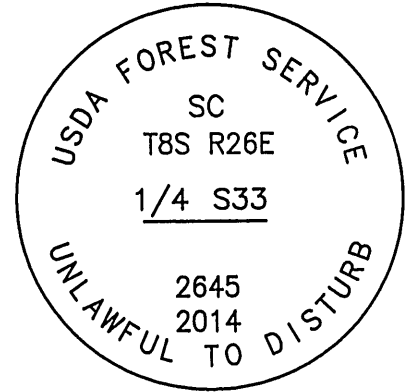

New accessories:

A 1/2" x 12" rebar with 1 1/4" aluminum cap stamped "RM1" bears S47°59'E, 5.6'.
A 1/2" x 12" rebar with 1 1/4" aluminum cap stamped "RM2" bears N23°35'E, 11.9'.
A 1/2" x 12" rebar with 1 1/4" aluminum cap stamped "RM3" bears S65°08'W, 7.4'.
A 1/2" x 12" rebar with 1 1/4" aluminum cap stamped "RM4" bears N54°26'W, 11.6'.

Geodetic Coordinates (NAD83):

N 44°49'24.9"
W 119°37'19.7"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver and were averaged.

Date: September 17, 2014

Bearing to accessories are Geodetic.

Witnesses: Paul Guglielmelli and Toribio Quinones

