CORNER RESTORATION

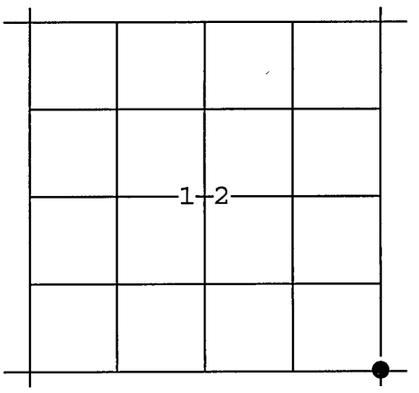

CORNER: SE Sec 12 TWP. 8S. RANGE 27E.

ORIGINAL SURVEY BY: Aaron F. York

CONTRACT NUMBER: 309

CONTRACT DATE: Nov. 18, 1878

Subsequent retracement by Henry Meldrum
under contract No. 380, dated Mar. 19, 1881.

ORIGINAL DESCRIPTION: Set Stone 22x16x10 for Cor. to Secs. 12, 13, 7, and 18. Raised Stone Mound at Cor.

Meldrums Retracement: 80.08 To a point 42 lks. E. of cor. to Secs. 7 & 18.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
G.J. Russell
D.E. Mooney

RECEIVED AND
FILED
June 4, 1996
OFFICE OF COUNTY SURVEYOR
Robert D. Bagett
ATTEST: Steven D. Follweiler

REGISTERED
PROFESSIONAL
LAND SURVEYOR
Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598
RENEWAL DATE 12/31/97

April 10, 1996 Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 18x14x10 tipped over to east in a mound of stone, marked with 4 notches on the north edge and 2 notches on the south edge.

A fence running north and south is 12 ft. west of corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 20" in the ground, with attached Grant County Surveyor brass cap marked as shown.
From which I SCRIBE NEW BEARING TREES:
A Pine 6" diam., bears N64°E, 12.9 ft.
marked X CSBT.
A Juniper 8" diam., bears S10°E, 12.4 ft.
marked T8SR28ES18 CSBT.
A Juniper 7" diam., bears N26°W, 48.8 ft.
marked T8SR27ES12 CSBT.

Also: I SET A NEW REFERENCE POINT:
A 5/8"x20" iron pin, bears S78°W, 9.40 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1996 OPLS 598.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR
T8S
R27E R28E
S12 | S7
S13 | S18
1996
OPLS 598

Buried marked stone South and alongside iron pipe, raised a mound of stone 4 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.