CORNER RESTORATION

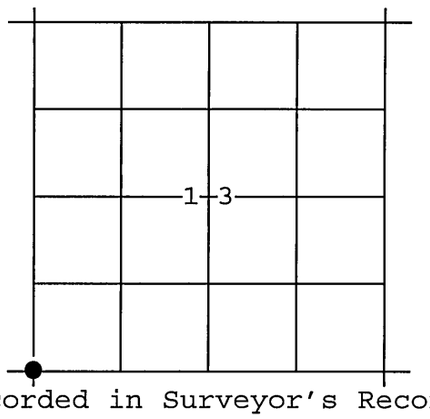

CORNER: SW Sec 13 TWP. 8S. RANGE 27E.

ORIGINAL SURVEY BY: Aaron F. York

CONTRACT NUMBER: 309

CONTRACT DATE: Nov. 18, 1878

Subsequent retracement by Vernon Glaze, Grant County Surveyor, dated May 24, 1913, recorded in Surveyor's Record Book 1 Page 72.

ORIGINAL DESCRIPTION: Set Stone 24x10x6 for Cor. to Secs. 13, 14, 23, and 24. Raised Stone Mound at Cor.

Glazes retracement: ... to SE cor. Sec. 14 ... set at S.E. cor. Sec. 14 run N...

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
G.J. Russell
D.E. Mooney

RECEIVED AND FILED
June 4, 1996
OFFICE OF COUNTY SURVEYOR
Robert D. Bagett
ATTEST: Steven D. Follweiler

REGISTERED PROFESSIONAL LAND SURVEYOR
Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598
RENEWAL DATE 12/31/97

April 17, 1996 Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 24x11x10 marked with 4 notches on one edge and 2 notches on the adjacent edge, lying loose on the west side of a mound of stone.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x20" galv. iron pipe, 15" in the ground, with attached Grant County Surveyor brass cap marked as shown.
From which I SCRIBE NEW BEARING TREES:
A Juniper 10" diam., bears N55°E, 104.1 ft. marked T8SR27ES13 CSBT.
A Juniper 13" diam., bears S09°E, 87.4 ft. marked T8SR27ES24 CSBT.
A Juniper 6" diam., bears S52°W, 54.4 ft. marked X CSBT.
A Juniper 6" diam., bears N19°W, 61.8 ft. marked X CSBT.

MONUMENT MARKED

GRANT COUNTY SURVEYOR

T8S R27E

S14	S13
S23	S24

1996
OPLS 598

Placed marked stone in mound of stone west and alongside iron pipe, raised a mound of stone 4 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.