RECORD OF LAND CORNER MONUMENTATION

CORNER: SE CORNER SEC. 13, TWP. 8 S., RANGE 27 E., W.M.

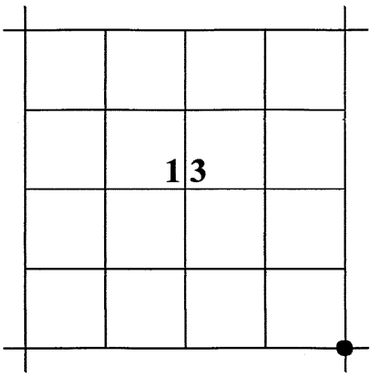

ORIGINAL SURVEY BY: Aaron S. York

CONTRACT NUMBER: 335

CONTRACT DATE: August 11, 1879

SUBSEQUENT SURVEY: Remonumented in 1973 by Robert D. Bagett, County Surveyor

---

ORIGINAL DESCRIPTION: *Set stone 14x12x6 for cor. to secs. 13, 24, 18, and 19. From which A yellow pine 36 ins. diam., bears N.75°W., 18 lks. dist. A yellow pine 30 ins. diam., bears N.10°E., 113 lks. dist. A yellow pine 10 ins. diam., bears S.20°E., 132 lks. dist. A yellow pine 38 ins. diam., bears S.15°W., 108 lks. dist.*

BAGETT'S RECORD: "Found basalt stone 12x6x4 inches buried flush with the ground and marked 8/27 on one side and 8/28 on the other side. The 8/27 side of the stone was up, indicating that the stone had been disturbed, as it turned out the stone was about 3 ft. north of the position determined by the 3 old BTs. I placed the corner at the position fitting the BTs, the distances of which came together within 0.2 ft. Set a 1½"x30" iron pipe 26" in the ground with brass cap marked as shown. From which ORIGINAL BEARING TREES: The remains of a 30" pine stump brs N80°W, 11.9 ft. no mks. The remains of a 30" pine stump brs N16°E, 74.6 ft. no mks. A live 30" pine bears S72°E, 87.1 ft. mkd. R28 S19 in blaze. NEW BEARING TREES: A 6" Pine bears N58°E, 31.3 ft., mkd. S18 CS BT. A 13" pine bears S32°W, 25.4 ft., mkd. T8SR27E S24 CS BT. A 6" pine bears N29°W, 49.7 ft., mkd. S13 CS BT. I buried the original cor. stone West & alongside pipe and surrounded pipe with a mound of stone to brass cap."

EVIDENCE FOUND: I found Bagett's brass cap monument in a mound of stone. I also found all three of Bagett's BTs in good health all with healed blazes. The NE BT is now 11" dbh, the SW BT is now 20" dbh and the NW BT is now 12" dbh.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
I re-attached the BT tags to the bearing trees. I also set a fiberglass witness post alonside the monument. The Brass cap marked as shown.

From which, **I SET THE FOLLOWING REFERENCE POINT:**

- A 5/8"x30" iron pin bears N.47°44'E., 63.83 ft. with attached green plastic cap marked GCS RP.

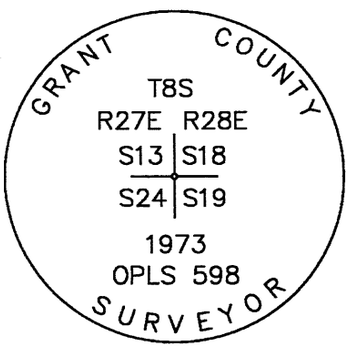

Used RTK GPS to measure the reference point. Bearings are based on Geodetic North obtained by GPS observation at the corner.

RESTORATION BY, STAMP AND DATE:

Work performed May 13, 2015 by:

Jason L. Hatfield, PLS
Deputy Grant County Surveyor
217 N. Canyon Blvd.
John Day, OR 97845

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

MAY 26 2015

BY:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
NOVEMBER 30, 2007
JASON L. HATFIELD
#69454

EXPIRES: 6/30/2015

N-25