CORNER RESTORATION

SW SC

CORNER sec. 34 TWP 8S RANGE 27E, WM

ORIGINAL SURVEY BY: Aaron S. York

CONTRACT NUMBER: 309

CONTRACT DATE: November 18, 1878

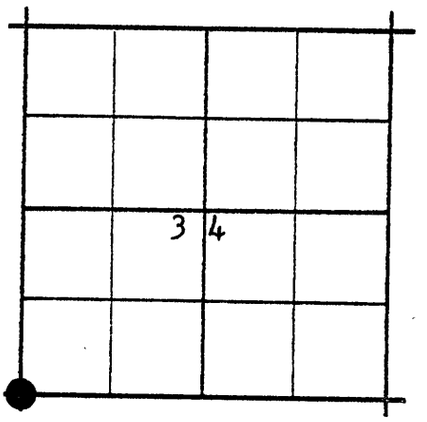

ORIGINAL DESCRIPTION:

80.00 chs. Set stone 16x12x10 for Standard Cor. to secs. 33 and 34.

RESTORATION BY, STAMP AND DATE:

BAGETT, GRIFFITH & FERGUSON
170 S. DAYTON - PH. 575-1251
JOHN DAY, OREGON 97845

REGISTERED
OREGON
LAND SURVEYOR
Robert D. Bagett
JULY 12, 1963
ROBERT D. BAGETT
598

January 23, 1971

EVIDENCE FOUND:

Found original basalt stone 16x12x10 ins. mkd. SC 8 / 27 in a mound of stone, cor. stone also bearing chiseled notches.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

Set 1½"x36" iron pipe 15 ins. in the ground, with brass cap mkd. as shown. Placed orig. monument W. & alongside pipe, & raised a mound of stone to top. from which

MONUMENT MARKED

A juniper, 8 ins. diam., bears N83°E., 56.2 ft., mkd T8S R27E S34 SC BT.

A juniper 10 ins. diam., bears N39°W., 52.7 ft., mkd. T8S R27E S33 SC BT.

SC
T8S R27E
S33 | S34
S5
T9S
1971
LS 598
GRANT COUNTY SURVEYOR

Mag. bearings--var.20°E. -- steel tape.

Complete and File with Office of the Grant County Surveyor, Grant County, Oregon, Courthouse, Canyon City, Oregon 97820

Z-13

See Remon Dated July, 1992

Survey #213