CORNER RESTORATION

CORNER SW SC sec. 35 TWP 8S RANGE 27E

ORIGINAL SURVEY BY: Aaron S. York

CONTRACT NUMBER: 309

CONTRACT DATE: November 18,1878

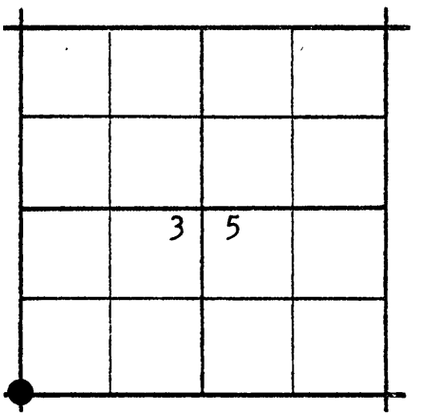

ORIGINAL DESCRIPTION:

80.00 Chs. Set Stone 26x18x15 for Standard Cor. to Secs. 34 and 35.
Raised stone mound at cor.

RESTORATION BY, STAMP AND DATE:

BAGETT, GRIFFITH & FERGUSON
170 S. DAYTON - PH. 575-1251
JOHN DAY, OREGON 97345

REGISTERED
OREGON
LAND SURVEYOR
Robert D. Bagett
JULY 12, 1963
ROBERT D. BAGETT
598

Jan. 1971

EVIDENCE FOUND:

Found original basalt cor. stone 26x18x15 ins. mkd. SC 8/27 in a mound of stone.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

Set a 1½"x36" iron pipe 20 ins. in the ground, with brass cap mkd. as shown.

No BTs available.
Set orig. cor. stone SW and alongside the iron pipe and raised a mound of stone, 3 ft. base, to top of pipe.

MONUMENT MARKED

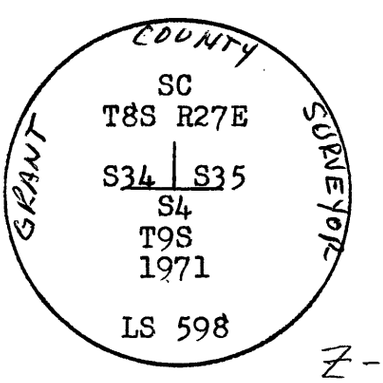

Complete and File with Office of the Grant County Surveyor, Grant County, Oregon, Courthouse, Canyon City, Oregon 97820

Z-17

Survey #213