RECORD OF LAND CORNER MONUMENTATION

CORNER: SE CORNER SEC. 35, TWP. 8 S., RANGE 27 E., W.M.

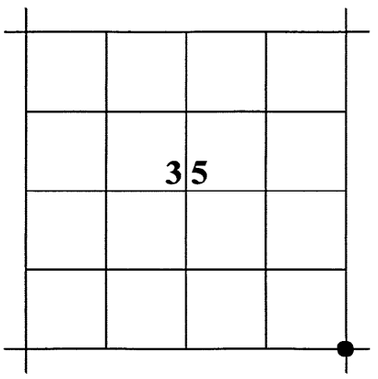

ORIGINAL SURVEY BY: Aaron S. York

CONTRACT NUMBER: 309

CONTRACT DATE: November 18, 1878

SUBSEQUENT SURVEY: Remonumented in 1973 by Robert D. Bagett, County Surveyor

---

ORIGINAL DESCRIPTION: *Set stone 16x12x8 for Standard Cor. to Secs. 35 & 36. Raised stone mound at cor.*

BAGETT'S RECORD: "This corner was pointed out to me by Leo Flowers in 1970 and by Don Capon in 1973. The corner is a basalt stone 15x11x7 inches marked 8/27 SC with 5 notches on one edge. This corner stone was in a rock jack fence corner of fences running N.20°W., and N.87°E. This position is in harmony with the original calls to natural features to the East and West. At the corner point I set a 1½"x36" iron pipe 34 ins. in the ground, with brass cap marked as shown. From which NEW BEARING TREES: A scrub juniper, 14 ins. diam., bears S.49°05'W., 57.1 ft., scribed X CS BT. A juniper 10 ins. diam., bears N.85°45'E., 134.0 ft., scribed T8S R27E S36 CS BT. I surrounded the pipe with a mound of stone and placed the original cor. stone South and alongside the pipe...."

EVIDENCE FOUND: I found Bagett's brass cap monument in a mound of stone flush with the ground, approximately 1 foot south of a fence corner. I also found both BTs in good health with partially healed blazes and visible scribing. The SW BT is now 23" in diameter and the NE BT is now 19.5" in diameter. BT tags were missing on both trees.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
I attached new BT tags to the bearing trees, with Bagett's record corner tie information. I also attached a yellow aluminum location poster to the fence post. The Brass cap marked as shown.
From which, **I SET THE FOLLOWING REFERENCE POINTS:**

- A 5/8"x30" iron pin bears N.47°44'E., 63.83 ft. with attached green plastic cap marked GCS RP.
- A 5/8"x30" iron pin bears N.85°38'W., 142.47 ft. with attached green plastic cap marked GCS RP.
- A 5/8"x30" iron pin bears N.00°22'W., 43.54 ft. with attached green plastic cap marked GCS RP.

Used RTK GPS to measure the reference points. Bearings are based on Record Map of Survey No. 2031

GRANT COUNTY
SC
T8S R27E
S35 | S36
S3
T9S
1973
LS 598
SURVEYOR

STATE PLANE COORDINATES (3601 OR N)
Reference Datum: NAD83 from OPUS solution
Northing: 423,953.5 ft.
Easting: 8,473,895.5 ft.
Ellip. Ht: 2,155.8 ft.

RESTORATION BY, STAMP AND DATE:

Work performed May 18, 2015 by:

Jason L. Hatfield, PLS
Deputy Grant County Surveyor
217 N. Canyon Blvd.
John Day, OR 97845

RECEIVED AND FILED
GRANT COUNTY SURVEYOR
MAY 26 2015
BY:

REGISTERED
PROFESSIONAL
LAND SURVEYOR
OREGON
NOVEMBER 30, 2007
JASON L. HATFIELD
#69454
EXPIRES: 6/30/2015

Z-21