RECORD OF LAND CORNER MONUMENTATION

CORNER: WITNESS CORNER TO THE SE CORNER SECTION 36, TWP. 8 S., RANGE 27 E., W.M.

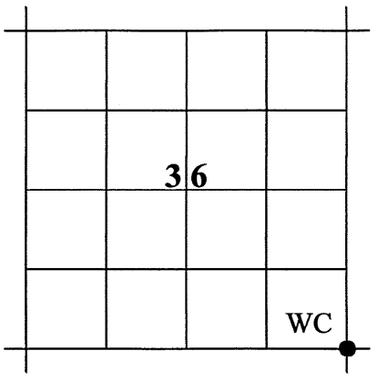

ORIGINAL SURVEY BY: Aaron S. York

CONTRACT NUMBER: 309

CONTRACT DATE: November 18, 1878

SUBSEQUENT SURVEY: Remonumented in 1973 by Robert D. Bagett, County Surveyor

---

ORIGINAL DESCRIPTION (for Section Corner): *Set stone 14x10x10 for standard cor. to Townships 8 and 9 South Ranges 27 and 28 East Willamette Meridian, Oregon. Raised stone mound at corner.*

BAGETT'S RECORD (for Section Corner): "Found a basalt stone 13x8x10 inches set in a mound of stone marked 8/27 on West face, 8/28 on East face and six notches on N. edge of stone. This corner is on the extension of a fence running S.87°W., and is in the bottom of a swale. Set a 1½"x30" iron pipe 28 inches in the ground with brass cap mkd. as shown. from which, NEW ACCESSORIES: A power pole bears N.10°E., 343.5 ft....A power pole bears S.53°E., 271.3 ft....Buried the original corner stone West and alongside the iron pipe..."

EVIDENCE FOUND: At some point after this corner was remonumented in 1973, a dam was constructed for a reservoir, submersing the corner under several feet of water. The power poles used for references by Bagett were apparantley removed, as they would have also been submerged. Although this corner is inaccessible, it's position is not lost. Prior to the construction of the reservoir, Bagett had made several ties to this corner from control he had in the area. Although not of record, he tied this corner to the East 1/4 Corner of Section 36. He also prepared Record Map of Survey No.'s 863 and 1113, which provide ties to monumentation east and west of this corner along the Township line. I located these monuments by field measurements and utilized Bagett's ties to determine the position of this corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
The corner point now being inaccessible, I set a witness corner monument on the township line, which bears S.87°29'51"W., 500.00 ft. from the true corner. At the witness corner location, I set a 1½"x30" galvanized iron pipe with attached 2½" brass cap 28" in the ground. Raised a mound of stone, 2 foot diameter to the top of cap. Brass cap marked as shown.

From which, **I SET THE FOLLOWING REFERENCE POINTS:**

- A 5/8"x30" iron pin bears N.45°04'E., 18.95 ft. with attached green plastic cap marked GCS RP.
- A 5/8"x30" iron pin bears S.45°00'E., 19.38 ft. with attached green plastic cap marked GCS RP.
- A 5/8"x30" iron pin bears S.44°55'W., 19.51 ft. with attached green plastic cap marked GCS RP.
- A 5/8"x30" iron pin bears N.45°01'W., 19.48 ft. with attached green plastic cap marked GCS RP.

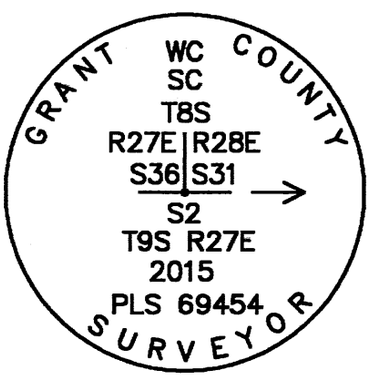

Used RTK GPS to measure the reference points. Bearings are based on Record Map of Survey No. 2031

RESTORATION BY, STAMP AND DATE:

Work performed May 18, 2015 by:

Jason L. Hatfield, PLS
Deputy Grant County Surveyor
217 N. Canyon Blvd.
John Day, OR 97845

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

MAY 2 6 2015

BY:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
NOVEMBER 30, 2007
JASON L. HATFIELD
#69454

EXPIRES: 6/30/2015

Z-25