RECEIVED A
F I L E D
FEB 26 1973
JOHN LIVEIRA, County Clerk
By _____ Deputy

CORNER RESTORATION

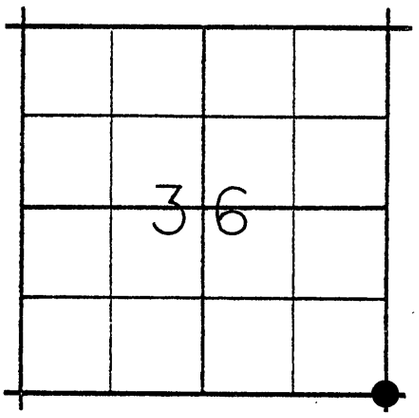

SE Cor.
CORNER Sec. 36 TWP 8 S., RANGE 27E, W.M.

ORIGINAL SURVEY BY: Aaron S. York

CONTRACT NUMBER: 335

CONTRACT DATE: August 11,1879

ORIGINAL DESCRIPTION:

East on a true line on the South boundary of sec. 36.

80.00 Set stone 14x10x10 for standard cor. to Townships 8 and 9 South Ranges 27 and 28 East Willamette Meridian, Oregon.
Raised stone mound at corner.
Var. 23°E.

RESTORATION BY, STAMP AND DATE:

REGISTERED PROFESSIONAL LAND SURVEYOR
Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

February 10,1973

EVIDENCE FOUND: Found a basalt stone 13x8x10 inches set in a mound of stone marked 8/27 on West face, 8/28 on East face and six notches on N. edge of stone.
This corner is on the extension of a fence running S.87°W, and is in the bottom of a swale.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var. At the corner point: Set a 1½"x30" iron pipe 28 inches in the ground with brass cap mkd. as shown. from which, NEW ACCESSORIES:
A power pole bears N.10°E., 343.5 ft. (dist taken to a 8 penny nail in base of pole on west side).

A power pole bears S.53°E., 271.3 ft.(dist. taken to a 8 penny nail in base of pole on SW side).

Buried the original corner stone West and alongside the iron pipe. Also buried several large stones alongside the pipe.Set a steel fence post 1 ft. W. of the pipe. (Used steel tape and compass with 20°E. Var.).

MONUMENT MARKED

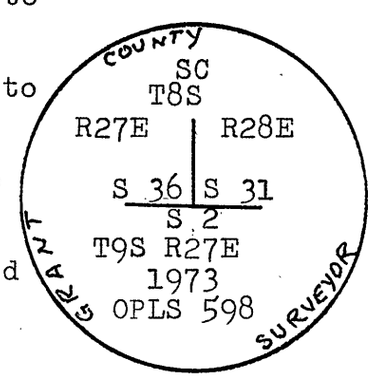

Complete and File with Office of the Grant County Surveyor, Grant County, Oregon, Courthouse, Canyon City, Oregon 97820

Z-25