


CORNER RESTORATION

CORNER: C1/4 Cor. Sec. 2 Twp. 9 S. Range 26 E., W.M.

ORIGINAL SURVEY BY: NOT

SURVEY NUMBER: PREVIOUSLY

CONTRACT DATE: ESTABLISHED




ORIGINAL G.L.O. DESCRIPTION: *None*

EVIDENCE FOUND: N/A

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED: At the corner point, I set a 5/8"X30" iron pin with attached 2" aluminum cap, driven 30 inches in the ground. I built a 1 foot mound of stone around the new monument. See Record Map of Survey No. 1947.

FROM WHICH I SET THE FOLLOWING REFERENCE POINTS:

- A 5/8"X30" iron pin, bears N.22°22'W., 30.38 feet, with attached yellow plastic cap marked "BENCHMARK SURVEYING"
- A 5/8"X30" iron pin, bears S.55°51'E., 27.00 feet, with attached yellow plastic cap marked "BENCHMARK SURVEYING"
- A 5/8"X30" iron pin, bears N.84°25'W., 57.01 feet, with attached yellow plastic cap marked "BENCHMARK SURVEYING"
- A 5/8"X30" iron pin, bears N.55°43'W., 54.93 feet, with attached yellow plastic cap marked "BENCHMARK SURVEYING"

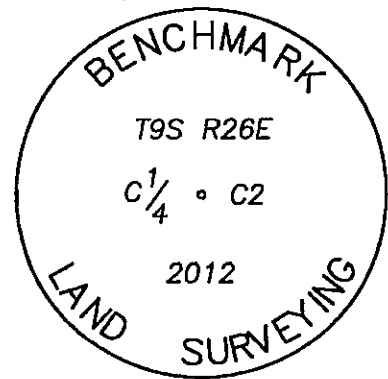

STATE PLANE COORDINATES (3601 OR N)

Reference Datum: NAD83 From OPUS Solution

Northing: 421,306.9 ft.
Easting: 8,445,416.5 ft
Ellip. Ht: 2,556.2 ft

RESTORATION BY, STAMP AND DATE:


Michael C. Springer, PLS
Jason L. Hatfield, PLS

March 20, 2012

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

APR 4, 2012

BY 



EXPIRES: 6/30/2012