


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: Aaron York, Deputy Surveyor, under Contract No. 335, dated August 11, 1879.

Surveyor General Record States: Set stone 13x9x7 inches, for 1/4 section corner.

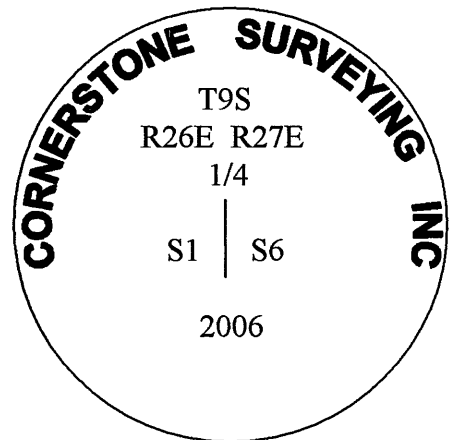

Description of corner evidence found:

Found a stone 14x10x9 inches, lying loose just downhill from a mound of stones. The corner stone is marked 1/4. I accept the mound of stone for the corner position.

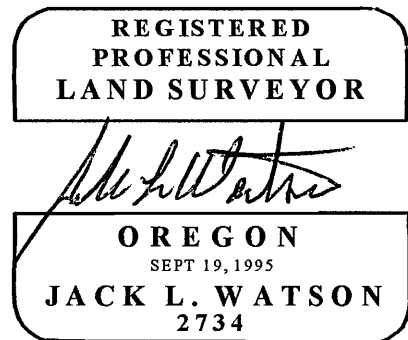

Description of monument and accessories set at corner location:

I accept the mound of stone for the position of this corner. I set a 5/8"x30" iron pin with attached 2" aluminum cap, surrounded by a mound of stone. Placed original marked stone west alongside monument. The cap is stamped as shown in the diagram.

From which:

A 5" Juniper bears N14°W, 60.8 feet, marked XBT.

A 25" Juniper bears S41°E, 73.3 feet, marked 1/4S6BT.

A 5" Juniper bears South, 69.7 feet, marked XBT.

A 5/8"x30" iron pin bears S18°W, 18.1 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination. See Grant County Survey No. 1783.

Date: November 1, 2006

Office of Surveyor County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 7 day of DEC, 2006.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)