

CORNER RESTORATION

T. 9 S., R. 26 E., W.M.


CORNER: 1/4 CORNER COMMON TO SECS. 16 & 17

ORIGINAL SURVEY BY: AARON F. YORK

CONTRACT NUMBER: 335

CONTRACT DATE: AUG. 11, 1879

COMPLETION DATE: NOV. 24, 1879

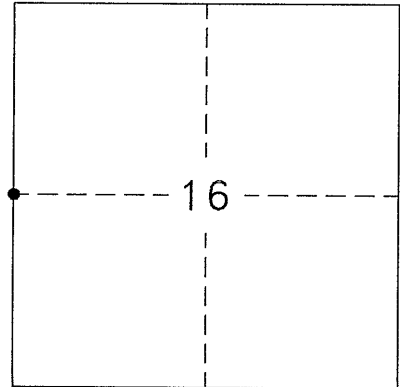

ORIGINAL DESCRIPTION: "SET STONE 14x9x7 FOR 1/4 SEC. COR.
STONE MOUND AT COR."

RESTORATION BY,
STAMP AND DATE:

JACK E. RANDELL JR.
MON. SET: 10/1/04

WITNESS POINTS SET: 3/17/07

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 13, 2004
JACK E. RANDELL
74807

3/25/07

RENEWAL DATE: 12/31/08

RECEIVED AND
FILED

MAR. 29, 2007
OFFICE OF COUNTY SURVEYOR
Robert D. Baggett
Attest: *[Signature]*


EVIDENCE FOUND:

FOUND SMALL EMBEDDED MOUND OF STONE IN FAINT REMAINS OF OLD NORTH/SOUTH WIRE FENCE. (FIELD-CUT WOODEN POSTS, REMNANTS OF BARBED WIRE). I EXCAVATED THE MOUND, BUT FOUND NO FURTHER EVIDENCE. ACCEPTED AS THE BEST AVAILABLE EVIDENCE OF THE ORIGINAL CORNER LOCATION.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

1/4 CORNER LOCATION WAS RESTORED FROM EVIDENCE OF THE ORIGINAL CORNER MONUMENT. (REF: RECORD MAP OF SURVEY NO. 1726).
THE SECTION CORNER COMMON TO SECTIONS 8, 9, 16 & 17 BEARS N02°15'44"W A DISTANCE OF 2465.63 FT.
AT THE 1/4 CORNER LOCATION, IN THE CENTER OF THE FOUND MOUND OF STONE, I SET A 5/8x30" REBAR WITH 2" ALUMINUM CAP, AND SET A 5 FT. "U-BAR" FENCE POST AS GUARD STAKE.

MONUMENT MARKED:

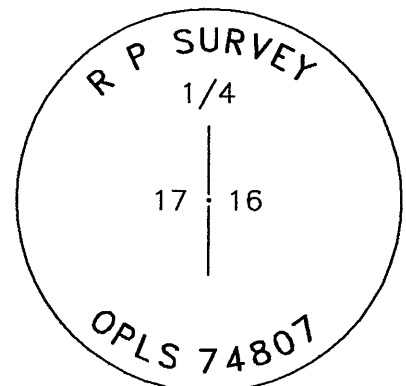

AT THE DIRECTION OF ROBERT D. BAGETT, GRANT COUNTY SURVEYOR, I ALSO SET FOUR (4) WITNESS POINTS TO THE SUBJECT CORNER, CONSISTING OF 5/8"Ø REBARS WITH 2" ALUMINUM CAPS STAMPED "RP SURVEY, OPLS 74807, WP". THE DIRECTIONS FROM THE SUBJECT CORNER TO THE WITNESS POINTS WERE DETERMINED WITH A MAGNETIC COMPASS USING AN 18° EAST VAR. THE COURSES FROM THE SUBJECT CORNER TO THE WITNESS POINTS ARE AS FOLLOWS:

- NO. 1: N. AZ. 19° 27.36 FT. (HORIZ.)
- NO. 2: N. AZ. 68° 22.38 FT.
- NO. 3: N. AZ. 163° 18.12 FT.
- NO. 4: N. AZ. 267° 23.34 FT.