


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: A. F. York, Deputy Surveyor, under Contract No. 335, dated Aug. 11, 1879.

Surveyor General Record States: Set stone 18x12x6 inches, for corner to sections 19,30,24 & 25 raised stone mound at corner.

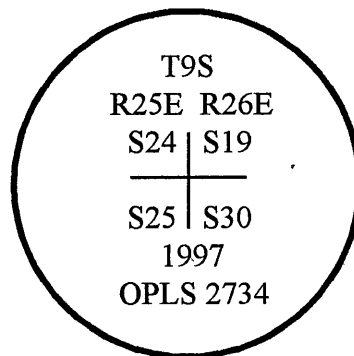

Description of corner evidence found:

I found a stone 19"x10"x6" set in a mound of stone, marked with 5 grooves on the North face and 1 groove on the South face.

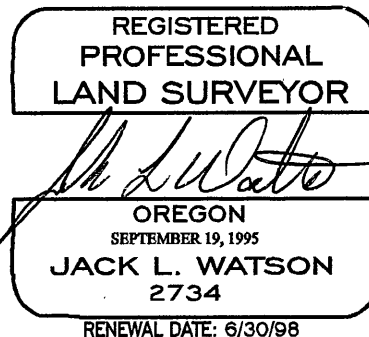

Description of monument and accessories set at corner location:

I accept the marked corner stone position for this corner. I set a 3"x3" brass rock cap drilled and grouted into solid rock, built a mound of stone north of cap. I placed the original marked corner stone in the mound north of the brass cap. The cap is stamped as shown in the diagram.

From which I set new reference monuments:

A 5/8"x6" iron pin grouted into bed rock bears N66°E, 5.76 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x6" iron pin grouted into bed rock bears S18°E, 9.58 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x6" iron pin grouted into bed rock bears S37°W, 23.09 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

A 5/8"x6" iron pin grouted into bed rock bears N19°W, 13.91 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape and magnetic compass, with 20° E. declination, to tie references.

Date: November 23, 1997

Office of GRANT SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 16 day of Dec, 1997.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)