


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: Aaron York , Deputy Surveyor, under Contract No. 335, dated Aug. 11, 1879.

Surveyor General Record States: Set stone 18x14x6 for corner to sections 28,29,32 and 33. Stone mound at corner.

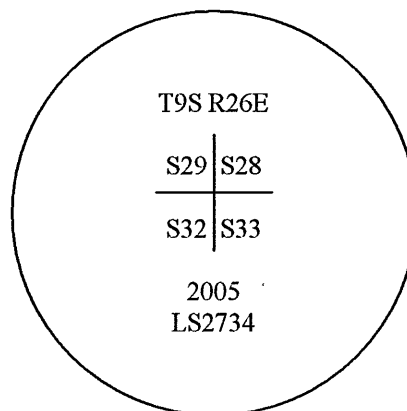

Description of corner evidence found:

Found basalt stone 18x15x4 lying in a mound of stones. The corner stone is marked with 4 grooves on one face and 1 notch on an edge. The stone was lying on its side, when the stone was set upright the 4 grooves faced east and the 1 notch was to the south. An ancient fence line runs north and south from this corner.

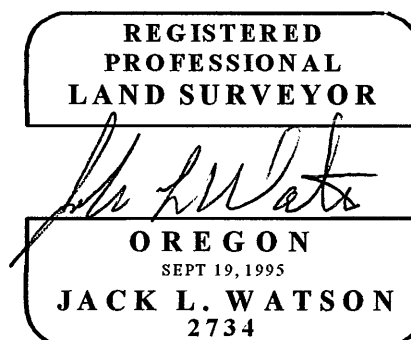

Renewal Date 6/30/2006

See Map of Survey No. 1741

Description of monument and accessories set at corner location:

At the original corner stone position I set a 2½" x 30" aluminum pipe with attached 2½" aluminum cap. Built a mound of stone to the top of the cap. The cap is stamped as shown in the diagram.

From which:

A 7" Juniper bears S05°W, 55.64 feet, marked T9SR26ES32BT.

A 5/8"x30" iron pin bears N40°E, 10.62 feet, with attached red plastic cap marked CORNERSTONE SURVEYING, INC.

A 5/8"x30" iron pin bears S37°E, 8.05 feet, with attached red plastic cap marked CORNERSTONE SURVEYING, INC.

A 5/8"x30" iron pin bears S66°W, 9.52 feet, with attached red plastic cap marked CORNERSTONE SURVEYING, INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT and magnetic compass, with 18° E. declination.

Date: May 26, 2005

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 28 day of Oct, 2005.
Robert D. Buzen by _____
(COUNTY OFFICIAL) (DEPUTY)