


**CORNER RESTORATION**

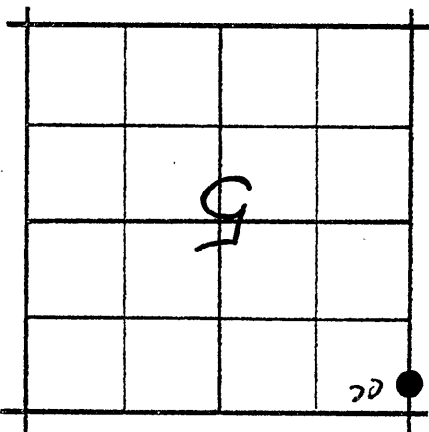

NW CC  
 CORNER sec 5 TWP 9S RANGE 27E WM

ORIGINAL SURVEY BY: Aaron S. York

CONTRACT NUMBER: 335

CONTRACT DATE: August 11, 1979

**ORIGINAL DESCRIPTION:**

North bet. secs. 5 & 6.

75.75 chs. Intersected Special Standard Line 85 lks. E. of Cor. to secs. 32 and 33, T8S R27E  
 Set stone 18x14x10 for CC to secs 5 & 6 T9S R27E.  
 Stone mound at cor.

**RESTORATION BY, STAMP AND DATE:**

REGISTERED  
 OREGON  
 LAND SURVEYOR

*Robert D. Baggett*

JULY 12, 1963  
 ROBERT D. BAGGETT  
 598

BAGETT, GRIFFITH & FERGUSON  
 170 S. DAYTON - PH. 575-1251  
 JOHN DAY, OREGON 97845

Jan. 1971

**EVIDENCE FOUND:**

Found 18x14x10" basalt stone mkd. CC in stone mound about 18 1/2 ft. South of the Twp line. The falling to the Standard Cor. of secs. 32 & 33 is 553.2 feet East instead of 85 lks. as called for in the gov't field notes.  
 This position harmoniously relates to improvements and other found corners in the area.

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:**

Show how trees are scribed and basis of bearings, including compass var. At the closing cor. (not the true cor.). Set a 1 1/2"x3/6" iron pipe 30 ins. in the ground, with brass cap mkd. as shown.  
 From which  
 A 12" juniper brs. S46°02'E, 72.3 ft., mkd. T9SR27E S5 CC BT.  
 A 10" juniper brs. S10°15'W, 81.0 ft, mkd. T9S R27E S6 CC BT.

Set original CC stone alongside pipe & raised a mound of stone around pipe to top of cap.

True bearings. steel tape  
 Complete and file with Office of the Grant  
 County Surveyor, Grant County, Oregon,  
 Courthouse, Canyon City, Oregon 97820

GRANT COUNTY  
 T8S  
 S33  
 S6 | S5  
 T9S R27E  
 CC  
 1971  
 TS 598

A-5  
 Survey #213