


CORNER RESTORATION

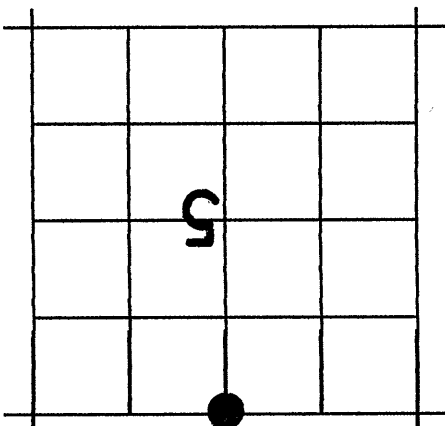

CORNER: N $\frac{1}{2}$ Sec: 5 TWP: 9S. RANGE: 27E.

ORIGINAL SURVEY BY: Aaron F. York

CONTRACT NUMBER: 335

CONTRACT DATE: Aug. 11, 1879

Subsequently remonumented by R.D. Baggett,
County Surveyor in 1971.

ORIGINAL DESCRIPTION: This $\frac{1}{4}$ cor. was not set by the government surveyors. W.F. White, previous Grant Co. Surveyor states in Book 1 page 53 of the Surveyors Record that he set this cor. in 1898, his record is as follows: I then placed a stone marked thus $\frac{1}{4}$ CS 40.73 chs. west from the sec. cor. for secs. 4 and 5 on SS Tp line and raised stone mound around corner.

Baggett's Record:
Set a $1\frac{1}{2}$ "x36" iron pipe 32" in the ground with brass cap..., and surrounded pipe with mound of stone in 1971,
From which:
A Juniper 10" diam., bears S25°10'E, 169.7 ft.
marked T9SR27E $\frac{1}{2}$ S5 BT.
A Juniper 14" diam., bears S38°09'W, 185.3 ft.
marked T9SR27E $\frac{1}{2}$ S5 BT.

RESTORATION BY, STAMP AND DATE:

R.D. Baggett
G.J. Russell
S.D. Follweiler
N.I. Fowle

RECEIVED AND
FILED

AUG 26 1992

Attest:
[Signature]
OFFICE OF COUNTY SURVEYOR

OREGON
JULY 12, 1863
ROBERT D. BAGGETT
598

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Grant County Surveyor

June 23, 1992

EVIDENCE FOUND: I found a Brass Cap flush with surface of field.

Monument Marked:
GRANT COUNTY
SURVEYOR

1/4 S5
T9S R27E
1971
LS 598

From which:
A Juniper 21" diam., bears S39°W, 185.3 ft.
Scribe Visible.

See Map of Survey Number 1219.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin bears N45°E, 25.0 ft. with attached
aluminum cap marked GRANT COUNTY SURVEYOR RP 1 1992 OPLS 598
A 5/8"x30" iron pin bears S55°E, 25.0 ft. with attached
aluminum cap marked GRANT COUNTY SURVEYOR RP 2 1992 OPLS 598
A 5/8"x30" iron pin bears S45°W, 30.0 ft. with attached
aluminum cap marked GRANT COUNTY SURVEYOR RP 3 1992 OPLS 598
A 5/8"x30" iron pin bears N55°W, 25.0 ft. with attached
aluminum cap marked GRANT COUNTY SURVEYOR RP 4 1992 OPLS 598

Set a steel fence post 0.5 feet North of corner.
Used mag. compass with 20°E var. and a steel tape.