

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: Aaron York, Deputy Surveyor, under Contract No. 335, dated August 11, 1879.

Surveyor General Record States: Set stone 14x10x8, for 1/4 section corner.



Description of corner evidence found:

No evidence of the original corner stone monument was found.

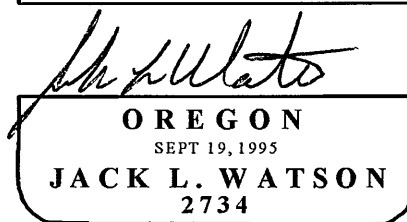

Renewal Date 6/30/2008

Description of monument and accessories set at corner location:

At the proportion position I set a 2 1/2"x30" aluminum pipe with attached 3 1/2" aluminum cap, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which:

- A 12" Juniper bears N67°W, 42.9 ft., marked 1/4S6BT.
A 5/8"x30" iron pin bears N8°E, 16.18 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.
A 5/8"x30" iron pin bears N82°E, 15.57 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.
A 5/8"x30" iron pin bears S14°W, 14.07 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT and magnetic compass, with 18° E. declination. See Grant County Survey No. 1839.

Date: April 1, 2008

Office of Surveyor County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office for record on the 7 day of APRIL, 2008.
Robert D. Soyett by (DEPUTY)