


CORNER RESTORATION

CORNER: S $\frac{1}{4}$ Sec: 5 TWP: 9S. RANGE: 27E.

ORIGINAL SURVEY BY: Aaron F. York

CONTRACT NUMBER: 335

CONTRACT DATE: Aug. 11, 1879
Subsequently remonumented by R.D. Bagett,
County Surveyor in 1971.

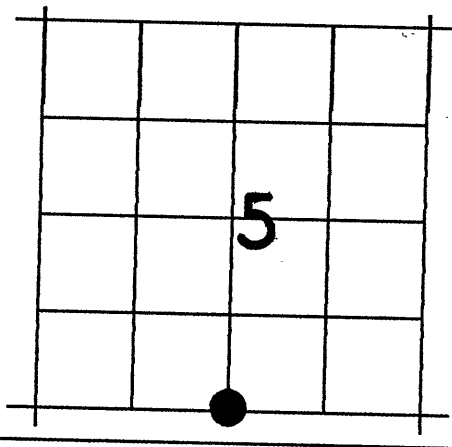

ORIGINAL DESCRIPTION: 21.50 chs. A road. 29.20 chs. A road. 39.90 chs. Set stone 15x13x9 and dug pits as per instructions for $\frac{1}{4}$ sec. cor. from which W.W. Cochrans house bears S.50°E., 2.90 chs. dist. 41.10 chs. A fence NE & SW 41.40 chs. A road NE & SW

Bagett's Record:

I set a 1 $\frac{1}{2}$ "x36" iron pipe with brass cap, 34" in ground and surrounded pipe with mound of stone in 1971,
From which:
A Juniper 10" diam., bears N23°W, 120.0 ft.
marked T9SR27E $\frac{1}{4}$ S5 BT.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler
N.I. Fowle

RECEIVED AND
FILED

AUG 26 1992

OFFICE OF COUNTY SURVEYOR
Attest: *Robert D. Bagett*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

Grant County Surveyor

June 23, 1992

EVIDENCE FOUND: Found a Grant County Surveyor Brass Cap flush with ground surface.

Monument marked:

Grant County
Surveyor

T9S R27E

S 5

$\frac{1}{4}$ —

S 8

1971

LS 598

From Which:

A Juniper 14" diam., bears N21°W, 120.0 ft.
Bark Scribe visible.

See Map of Survey Number 1219.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

NEW CORNER ACCESSORIES: I DESIGNATE NEW REFERENCE POINTS:

- A 5/8"x30" iron pin bears N13°E, 81.08 ft.
with attached aluminum cap marked BGA SURVEY MARKER 226+93.5 30 ft.
- A 5/8"x30" iron pin bears S62°W, 132.38 ft.
with attached aluminum cap marked BGA SURVEY MARKER 225+06.5 30 ft.
- A 5/8"x30" iron pin bears S84°W, 153.42 ft.
with attached aluminum cap marked BGA SURVEY MARKER 225+06.5 30 ft.

These are Right of Way monuments for county road #2. See Map Of Survey #1219. I used true bearings and EDM measuring to the center of the aluminum caps.

I ALSO SET A NEW REFERENCE POINT:

A 5/8"x30" iron pin bears S47°E, 30.00 ft. with attached aluminum cap marked Grant County Surveyor RP 1 1992 OPLS 598.

Used mag. compass with 20°E var. and a steel tape.