


# CORNER RESTORATION

**CORNER:** SW Sec 8 TWP. 9 S. RANGE 27E.

**ORIGINAL SURVEY BY:** Aaron F. York

**CONTRACT NUMBER:** 335

**CONTRACT DATE:** August 11, 1879

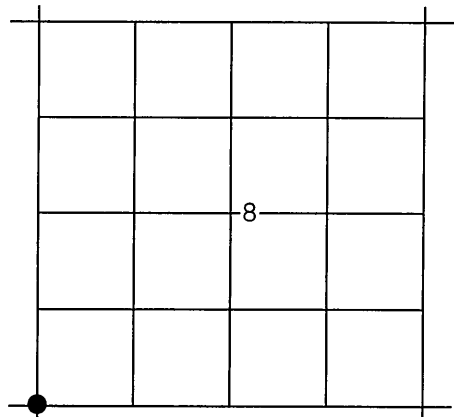

Subsequently remonumented by William A. Eimstad, PLS 377, in March, 1982. See Record Map of Survey No. 711. Subsequently surveyed by M. David Viles, LS 2029, in June, 1994. See Land Partition Plat No. 94-4.

**ORIGINAL DESCRIPTION:** Set Stone 12x10x8 for Cor. to Secs. 7. 8. 17 & 18. Stone Mound at Cor.

Record Map of Survey No. 711 shows: "FND STONE 12"x10"x8" 5 NOTCHES TO EAST. 4 NOTCHES TO SOUTH & RING OF 5 STONES. SET TIE ROD 4' LONG AT CORNER. BURY STONE TO SOUTH -& MOUND STONES. SCRIBE 17" JUNIPER S86°09'E 110.68' T9SR27ES17 BT. BO&+ ON STONE FACE ON 15' HIGH OUTCROP S39°55'E 179.23'."

Land Partition Plat No. 94-4 shows: "CORNER IS UNDER 5' FILL DIRT. FOUND 22" JUNIPER SCRIBED "19S R27E S17" "BT". S86°04'18"E 110.68' (CS 711). FOUND A CHISELED "+ B O" IN ROCK OUTCROP. S39°55'01"E 179.23' (CS 711). FIXED CORNER POSITION AT CS 711 RECORD DISTANCES FROM REFERENCES."

**RESTORATION BY, STAMP AND DATE:**

R.D. Bagett  
S.D. Follweiler  
M.C. Springer

RECEIVED AND  
FILED

MAR 3, 2000  
OFFICE OF COUNTY SURVEYOR

*Robert D. Bagett*

ATTEST: *Muller Sp*

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Robert D. Bagett*

OREGON  
JULY 12, 1963  
ROBERT D. BAGETT  
598

RENEWAL DATE 12/31/99

January 27, 2000

Grant County Surveyor

**EVIDENCE FOUND:** Found the steel tie rod set by William Eimstad, OPLS 377, 4 feet below fill surface. Also found the original stone 12'x9"x7" buried southerly alongside the tie rod and marked with 4 grooves on the east face and 5 grooves on the south face in a ring of stones.

I accept the tie rod as the position of the section corner.

From which:

A Juniper 22" bears S86°E, 110.7 ft. marked T9S R27E S17 BT.

A + BO chiseled on the north face of a rock outcrop bears S40°E, 179.2 ft.

**DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:**

Show how trees are scribed and basis of bearings, including compass var.

Over the center of the steel tie rod: I set a 1½"x30" galv.

iron pipe, 30" in the ground, with attached Grant County

Surveyor brass cap marked as shown.

From which I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N45°E, 40.00 ft., with

attached alum. cap marked GRANT COUNTY SURVEYOR RP 1

2000 OPLS 598.

A 5/8"x30" iron pin, bears N45°W, 20.00 ft., with

attached alum. cap marked GRANT COUNTY SURVEYOR RP 2

2000 OPLS 598.

A corner of fences running North and West

bears S14°W, 51 feet.

Bottom of iron pipe is 1 ft. above tie rod.

Raised a mound of stone 3 ft. base around top of cap.

Used mag. compass with 18°E var. and a steel tape.

Attached BT tag to BT.

**MONUMENT MARKED**

