


CORNER RESTORATION

CORNER: N¼ Sec:13 TWP: 9S. RANGE:30E.

ORIGINAL SURVEY BY: W. Byars

CONTRACT NUMBER: 197

CONTRACT DATE: July 14, 1873

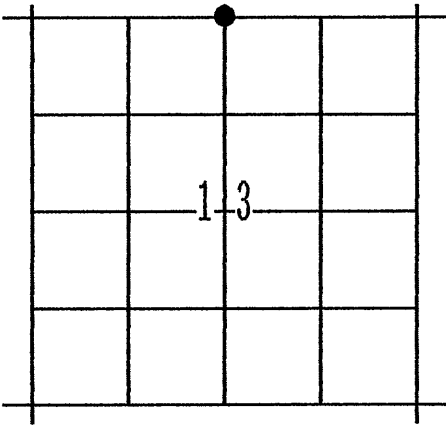

ORIGINAL DESCRIPTION: Set basalt stone 18x12x12 for the quarter section cor.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney

RECEIVED AND
FILED

OCT 14 1994

OFFICE OF COUNTY SURVEYOR
Robert D. Bagett
Attest: *James Russell*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett
OREGON
JULY 12, 1993
ROBERT D. BAGETT
598

Renewal Date 12/31/94

Sept. 28, 1994

Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 12"x14"x22" marked 1/4 on north face, firmly set in a mound of stone.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x18" galv. iron pipe, 15" in the ground, with attached Grant County Surveyor brass cap marked as shown.
From which I SET NEW REFERENCE POINTS:

- A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1994 OPLS 598.
- A 5/8"x30" iron pin, bears S45°E, 50.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1994 OPLS 598.
- A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1994 OPLS 598.
- A 5/8"x30" iron pin, bears N45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1994 OPLS 598.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR
T9S R30E
S12
¼
S13
1994
OPLS 598

Buried marked stone north and alongside iron pipe, raised a mound of stone 4 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.