


CORNER RESTORATION

CORNER: E $\frac{1}{4}$ Sec:14 TWP: 9S. RANGE:30E.

ORIGINAL SURVEY BY: W. Byars

CONTRACT NUMBER: 197

CONTRACT DATE: July 14, 1873

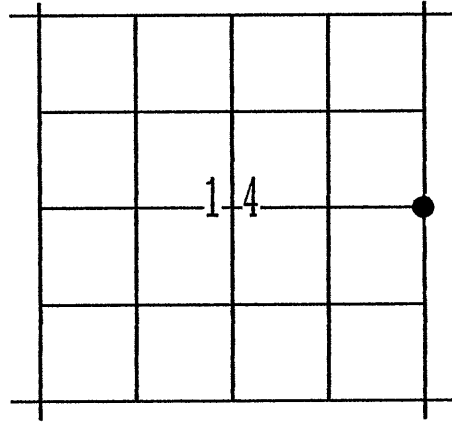

ORIGINAL DESCRIPTION: Set basalt stone 16x10x8 for the quarter section corner.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney

RECEIVED AND
FILED

OCT 14 1994

OFFICE OF COUNTY SURVEYOR
Attest: *Robert D. Bagett*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Renewal Date 12/31/94

Sept. 28, 1994

Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 8"x10"x16" marked 1/4 on the west face, firmly set in a mound of stone.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1 $\frac{1}{2}$ "x18" galv. iron pipe, 12" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SET NEW REFERENCE POINTS:

A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1994 OPLS 598.

A 5/8"x30" iron pin, bears S45°E, 35.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1994 OPLS 598.

A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1994 OPLS 598.

A 5/8"x30" iron pin, bears N45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1994 OPLS 598.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR

T9S R30E

$\frac{1}{4}$

S14 | S13

1994

OPLS 598

Placed marked stone west and alongside iron pipe, raised a mound of stone 4 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape.