


CORNER RESTORATION

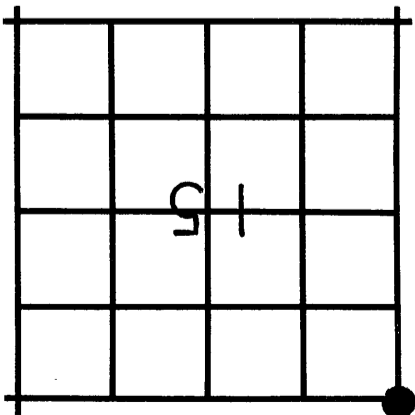

CORNER Sec. 15 TWP. 9 S RANGE 31 E
NW cor.

ORIGINAL SURVEY BY: Rufus S. Moore

CONTRACT NUMBER: 382

CONTRACT DATE: March 23, 1881

ORIGINAL DESCRIPTION:

80.00 set a basalt stone 18x14x10 and dug pits for corner to Secs. 9, 10, 15 and 16 from which a pine 36" in diam. bears N. 50° W. 53.1ks. dist.

RESTORATION BY, STAMP AND DATE:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Baggett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

R. D. Baggett
W. A. Potridge

EVIDENCE FOUND:

Found basalt stone 18x12x8 inches marked with 3 grooves on South side firmly set in a ring of smaller stones.

from which:
a 24" pine stump bears N. 50° W., 35.0 ft. (53 lks.)
marked BT in weathered blaze.


DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point:
Set a 1 1/2"x30" galvanized iron pipe 28 inches in the ground with brass cap marked as shown:
from which I scribe NEW BEARING TREES:

- A douglas fir 9 inches in diam. bears N. 64° E., 16.0 ft. marked T9SR31E510CSBT.
- A douglas fir 6 inches in diam. bears S. 49° E., 25.3 ft. marked T9SR31E515CSBT.
- A douglas fir 12 inches in diam. bears S. 71° W., 21.4 ft. marked T9SR31E516CSBT.
- A douglas fir 16 inches in diam. bears N. 50° W., 56.0 ft. marked T9SR31E59CSBT.

Buried corner stone West and alongside iron pipe. Surrounded pipe with mound of stone to top of cap. Used magnetic compass with 18° East variation and steel tape measuring to face of BT blaze.

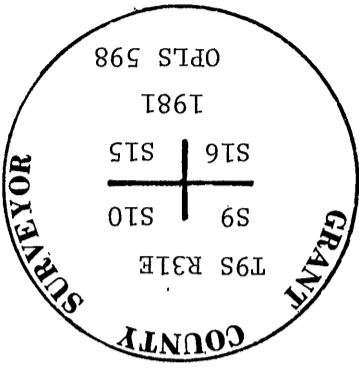

MONUMENT MARKED