

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishments:  
 \*  
 The original corner was set in 1881 by Rufus S. Moore under  
 Contract No. 382, dated March 23, 1881.  
 The original notes state:  
 N 89°42' East on N bdy of Sec 2  
 40.00 Set a basalt stone 18x12x8 and dug pits for 1/4 sec cor  
 S2  
 1/4---  
 T9S R31E  
 S35  
 T10S

Description of corner evidence found:  
 Found no evidence of the original stone.

Description of monument and accessories I establish to perpetuate the

I reestablish this corner by single proportion. Set a 2x28" aluminum monument 20" in the ground in a mound of stone.

T9S R31E  
 S35  
 1/4---  
 S2  
 T10S  
 PLS1918  
 1988

I establish new bearing trees:

A 3" Juniper bears N 37° W, 11.0 ft, scribed X BT.  
 An 18" P. Pine bears S 47-3/4° E, 76.1 ft, scribed 1/4S2BT.

New BTs have 3/4" brass washers marked PLS1918 attached to the BT blaze, faces and bands painted with red tree marking paint, and BT tags and Attention or Land Survey Monument signs. A steel fence post with Attention or Land Survey Monument sign is driven approximately 3-5 feet from the corner.


Sun Cadastral Survey, Cont No. 53-04H1-7-4011

Field Book: 4-25  
 Work accomplished: 8/10/88

Witnesses: Tyler Parsons, Sharon Parsons  
 Louise Parsons, Douglas Parsons

Job No.: 87221

PARSONS SURVEYING  
 1915 S.E. Stone Street  
 Corvallis, OR 97333  
 (503) 752-7515

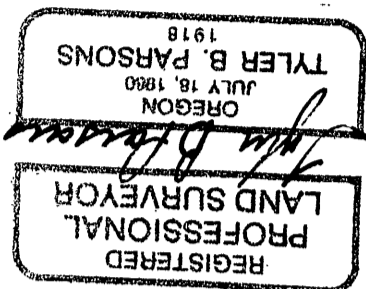

Office of COUNTY SURVEYOR  
 State of OREGON  
 for record on the 7th day of Feb, 1987  
 I hereby certify that the within instrument was filed in this office  
 County of GRANT

(COUNTY OFFICIAL)

by

(DEPUTY)