


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner first established by Herman D Gradon in 1881 under contract No. 416 dated August 19, 1881. Set a basalt stone 20"X12"X6", 15" in the ground, marked 1/4 on west face. Raised mound of stones alongside corner. B.T's., 30"Pine, S.65°W., 52 links, marked 1/4SBT.

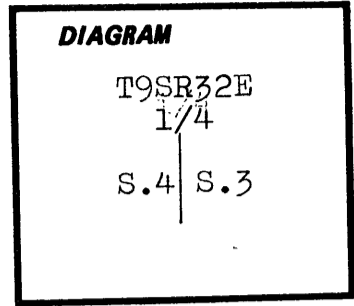

Description of corner evidence found:

Stone, 20"X12"X6", set firmly in the ground in a stone mound. West face has marks 1/4, the 1 appears to have flaked away. Stump, 36" diam. by 20" high, (30"pine) S.65°W., 52 links. No scribes. Fence, 6.0' West, runs N-S

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 2 1/2" diam. alum. cap in a 2 1/2"X30" alum. pipe at corner and buried cornerstone alongside pipe. Cap marked per sketch. Built stone mound, Set steel posts 3'± N. & S. of corner with signs attached.

T9SR32E
1/4
S4 | S3

13" D.B.H. Ponderosa pine, N.56°E., 7.6', scribed 1/4SBT RPLS1910
1/4S3BT. 1985

8" D.B.H. Ponderosa Pine, N.42°W., 39.9', scribed 1/4S4BT.

Each B.T. has a brass washer mkd. R.P.L.S. 1910 set between B&T., B.T. tag, attn. sign, bands and faces painted red.

Declination; 18° 45' East.



C.J. MARTIN SURVEYING
2751 JUNIPER ST.
SWEET HOME, OR 97386

Office of Surveyor County of Grant
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 13 day of Aug, 1985
Robert D. Gradon by Clayton J. Martin
(COUNTY OFFICIAL) (DEPUTY)