


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Original corner established by: Herman Gradon, Deputy Surveyor, under Contract No. 416, dated August 19, 1881.

The Record States: Set a basalt stone 12x10x6 inches, 8 inches in the ground, for corner to sections 20,21,28 and 29 marked with 2 notches on south and 4 notches on east edges, and raised a mound of stone.

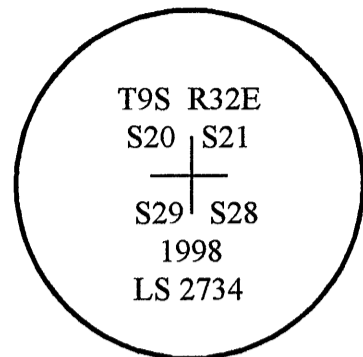

Description of corner evidence found:

Found stone 12"x11"x5" marked with 2 notches and 4 notches at a fence corner running north and east.

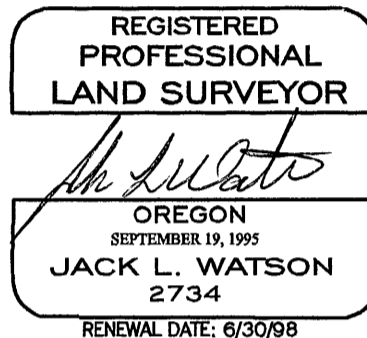

See Grant County Survey No. 1477.

Description of monument and accessories set at corner location:

At the position of the original marked stone, I set a 2½"x30" aluminum pipe with attached 3" aluminum cap, 10 inches in the ground, built mound of stone to top of cap, the cap is stamped as shown in the diagram

From which I set new reference monuments:

- A 5/8"x30" iron pin bears N50°E, 20.70 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.
- A 5/8"x30" iron pin bears S51°E, 12.40 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.
- A 5/8"x30" iron pin bears S50°W, 22.25 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.
- A 5/8"x30" iron pin bears N51°W, 18.50 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used magnetic compass, with 20° east variation and steel tape, to tie references.

Date: April 27, 1998

Office of SURVEYOR County of GRANT
 State of OREGON, I hereby certify that the within instrument was filed in this office
 for record on the 20 day of MAY, 1998.
Robert D. Gradon by _____
 (COUNTY OFFICIAL) (DEPUTY)