

RECEIVED AND

FILED

FEB 24 1972

JOHN LIVEIRA, County Clerk

CORNER RESTORATION


By \_\_\_\_\_ Deputy

North 1/4 cor.  
CORNER Sec. 28 TWP 9 S. RANGE 32 E., W.M.

ORIGINAL SURVEY BY: Herman D. Gradon

CONTRACT NUMBER: 416

CONTRACT DATE: August 19, 1881

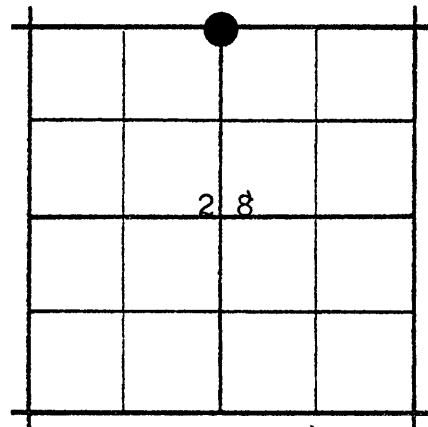

ORIGINAL DESCRIPTION:

N. 89° 28' W., on a true line bet. secs. 21 and 28.

39.91 chs. Set a basalt stone 18x8x6 ins., 12 ins in the ground, for the 1/4 sec. cor., marked 1/4 on N. face, and raised a mound of stone alongside.

RESTORATION BY, STAMP AND DATE:

BAGETT, GRIFFITH & FERGUSON  
170 S. DAYTON - PH. 575-1251  
JOHN DAY, OREGON 97845

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*Robert D. Bagett*

OREGON  
JULY 12, 1933  
ROBERT D. BAGETT  
598

Feb. 17, 1972

EVIDENCE FOUND:

Found a basalt stone 18x8x6 marked 1/4 and firmly set in a mound of stone.

Also found Taylors bearing tree, which is now a 20" diam. stump mkd. BT.

Mr. Taylor took two BTs for this cor. in 195<sup>7</sup>, see record.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var. Brass cap  
Set 1 1/2 x 30 inch iron pipe 24 ins. in the ground, marked as shown.  
Buried original cor. stone west and alongside pipe and raised  
a mound of stone, 3 ft. base, to top of pipe. MONUMENT MARKED

from which

A 20" pine stump bears S. 4° 20' E., 174.9 ft., marked BT. T9S R32E

NEW BEARING TREES

A 9" pine bears S. 49° 43' E., 183.3 ft., marked, T9S R32E 1/4 S28 BT.

A 14" pine bears S. 6° 10' W., 242.3 ft., marked, Complete and File with Office of the Grant T9S R32E 1/4 S28 BT. Bearings by solar obs.

County Surveyor, Grant County, Oregon, Distances to the center of Courthouse, Canyon City, Oregon 97820 the B.T.s. (new BTs)

