


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Original corner established by: Herman Gradon, Deputy Surveyor, under Contract No. 416, dated August 19, 1881.

The Record States: Set a basalt stone 12x12x6 inches, 8 inches in the ground, for 1/4 section corner marked 1/4 on west face and raised a mound of stone alongside.

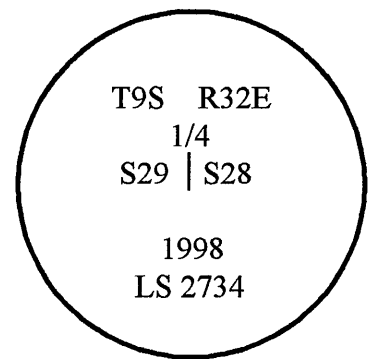

**Description of corner evidence found:**

After a diligent search I declare this corner lost, heavy machinery used to pile brush has disturbed the area around this corner.



See Grant County Survey No. 1477.

**Description of monument and accessories set at corner location:**

At the position determined by single proportionate measure, I set a 2 1/2"x30" aluminum pipe with attached 3" aluminum cap in a mound of stone, the cap is stamped as shown in the diagram.

From which I scribe new bearing trees:

- A 16" P.Pine bears N38°E, 169.83 feet, marked 1/4S28BT.
- A 16" P.Pine bears S72°E, 87.82 feet, marked 1/4S28 BT.
- A 14" P.Pine bears S18°W, 94.80 feet, marked 1/4S29 BT.
- A 15" P.Pine bears N11°W, 133.52 feet, marked 1/4S29 BT.

I used magnetic compass, with 20° east variation, to center of BT's and steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's.

Date: April 27, 1998

Office of Surveyor County of Grant  
 State of Oregon, I hereby certify that the within instrument was filed in this office  
 for record on the 20 day of MAY, 1998.  
Robert D. Bayart by \_\_\_\_\_  
 (COUNTY OFFICIAL) (DEPUTY)