


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Original corner established by: Herman Gradon, Deputy Surveyor, under Contract No. 416, dated August 19, 1881.

The Record States: Set a basalt stone 18x14x6 inches, 12 inches in the ground, for 1/4 section corner marked 1/4 on west face and raised a mound of stone alongside.

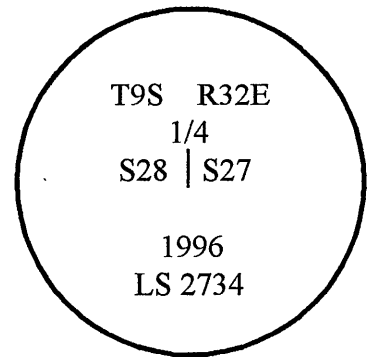

**Description of corner evidence found:**

Found basalt stone 17"x14"x6" marked 1/4 with a mound of stone to the west.



**Description of monument and accessories set at corner location:**

At the position of the original marked stone, I set a 2½"x30" aluminum pipe with attached 2½" aluminum cap in a mound of stone, the cap is stamped as shown in the diagram.

From which I scribe a new bearing tree:  
A 18" P.Pine bears S76°E, 226.61 feet, marked 1/4S27BT.

From which I set new reference monuments:  
A 5/8"x30" iron pin bears N13°E, 43.28 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.  
A 5/8"x30" iron pin bears S21°W, 35.89 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.  
A 5/8"x30" iron pin bears N54°W, 50.63 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used true bearings to the center of BT and EDM distance measuring to a 50d nail driven in the side center at the root crown of the BT. I used true bearings and EDM distances to tie reference.

Date: July 19, 1996

Office of SURVEYOR County of Grant  
State of OREGON, I hereby certify that the within instrument was filed in this office for record on the 30 day of APRIL, 1998.  
Robert D. Bayart by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)