

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment: *

The original corner was set in 1881 by Herman Gradon under Contract No. 416, dated August 19, 1881.

The original notes state:

N89°36'W on a true line bet Secs 29 & 32

39.88 Set a basalt stone 14x7x6 ins 9 ins in the ground for 1/4 sec cor marked 1/4 on N face and raised a mound of stone alongside.

DIAGRAM

T9S R32E

S29

1/4---

S32

Description of corner evidence found:

Found no evidence of the original corner.

Description of monument and accessories I establish to perpetuate the original location of this corner:

I reestablish the position of this corner by single proportion. Set a 2x28" aluminum monument 3" in the ground in a mound of stone.

T9S R32E

S29

1/4---

I establish new bearing trees:

S32

A 21" P.Pine bears N 66° E, 228.0 ft, scribed 1/4S29BT.

PLS1918


A 9" double Juniper bears S 70° E, 148.8 ft, scribed 1/4S32BT.

1988

New BTs have 3/4" brass washers marked PLS1918 attached to the BT blaze, faces and bands painted with red tree marking paint, and BT tags and Attention or Land Survey Monument signs. A steel fence post with Attention or Land Survey Monument sign is driven approximately 3-5 feet from the corner.

Sun Cadastral Survey, Cont No. 53-04H1-7-4011
Field Book: 4-45 & 6-45
Work accomplished: 9/8/88
Witnesses: Tyler Parsons, Louise Parsons
Job No.: 87221

PARSONS SURVEYING
1915 S.E. Stone Street
Corvallis, OR 97333
(503) 752-7515

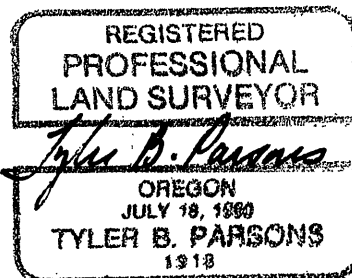

Office of COUNTY SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 27th day of Feb, 1989

Court D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)