CORNER RESTORATION

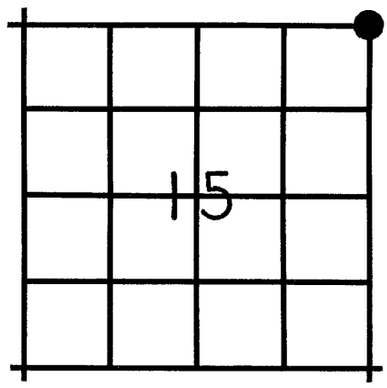

NE corner
CORNER Sec. 15 **TWP** 9 S **RANGE** 31E

ORIGINAL SURVEY BY: Rufus S. Moore

CONTRACT NUMBER: 382

CONTRACT DATE: March 23, 1881

ORIGINAL DESCRIPTION:

80.00 set a basalt stone 18x10x6 and dug pits for corner to Secs. 10, 11, 14 and 15, from which a Juniper 36 inches in diam. bears S. 13° W., 140 lks.

RECEIVED AND FILED
AUG 11 1981
OFFICE OF COUNTY SURVEYOR
Robert D. Bagett
Attest: Carol Waite
Co. Clk.

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
W. A. Potridge

REGISTERED PROFESSIONAL LAND SURVEYOR
Robert D. Bagett
OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

July 2, 1981

Grant County Surveyor

EVIDENCE FOUND:

Found basalt stone 18x10x8 inches lying on its side with another large stone alongside. I could not identify positive marks of this stone. I also found the original BT from the West end of the stone, which is where it was probably set, if set upright, the original BT, a pine snag 38" in diam. marked S15 R31 in blaze bears S. 13° E., 92.4 ft. I accept this position for the corner. Govt. notes call for Juniper bt.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

At the corner point:
Set a 1½"x30" galvanized iron pipe 26" in the ground with brass cap marked as shown, from which I scribe
NEW BEARING TREES:

A 6" Juniper bears N. 72° E., 8.2 ft. marked T9SR31ES11CSBT.
A 7" Juniper bears S. 46° E., 41.3 ft. marked T9SR31ES14CSBT.
A 7" Juniper bears S. 62° W., 61.0 ft. marked T9SR31ES15CSBT.
A 7" Juniper bears N. 44° W., 99.5 ft. marked T9SR31ES10CSBT.

Buried stone West and alongside iron pipe for a memorial, and surrounded pipe with a mound of stone.

Used magnetic compass with 23° East variation and steel tape measuring to face of blaze on new BT's.

MONUMENT MARKED

GRANT COUNTY SURVEYOR
T9S R31E
S10 | S11
S15 | S14
1981
OPLS 598

J-17