


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Not previously established.

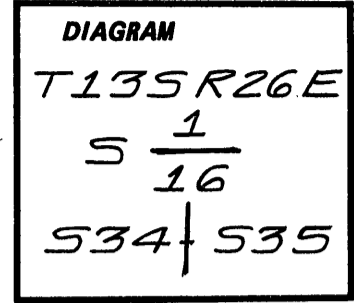

F.B.5 P.67 & 68
Y-17

Description of corner evidence found:

Not previously established.

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate position as determined by survey, set 2 1/2 inch O.D. aluminum pipe 30 inches long 17 inches in ground to bedrock with 3 1/4 inch aluminum cap marked as shown:

Marked new bearing trees:


a 17" Douglas Fir bears North 43°30' East, 28.8 ft., scribed-S1/16S35BT;
an 18" Ponderosa Pine bears North 61°45' West, 45.7 ft., scribed-S1/16S34BT.

Painted red band and faces red and nailed signs 54-3 and 54-9 to new bearing trees. Set steel post with sign 54-9 3 feet North of cap.

Nailed brass washer stamped-AS&E LS1026-to face of new bearing trees. Brown's Creek, course N65°E is 27 feet South of corner. Raised stone mound 3 foot diameter to cap.

I hereby certify the above corner monument was established as herein described on September 7, 1984.

Witnesses: David B. Armstrong
Lynn Bruno

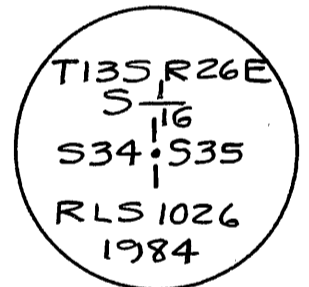

M.V.18°30'E.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 23 day of Nov, 1984
Robert D. Bagent by _____
(COUNTY OFFICIAL) (DEPUTY)

REGISTERED
PROFESSIONAL
LAND SURVEYOR

David B. Armstrong
10/24/84 OREGON
AUGUST 22, 1975
DAVID B. ARMSTRONG
1026