

CORNER RESTORATION


CORNER: W $\frac{1}{4}$ Sec 21 TWP 13S. RANGE 28E.

ORIGINAL SURVEY BY: Wm. Byars

CONTRACT NUMBER: 197

CONTRACT DATE: July 14, 1873

Subsequently remonumented by Robert D. Bagett, County Surveyor, May 31, 1980, See corner restoration records.

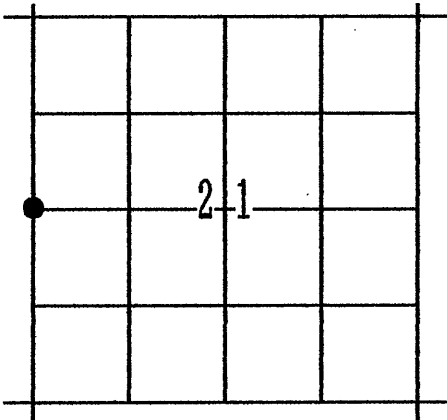

ORIGINAL DESCRIPTION: Set basalt stone 12x12x5 for the quarter section corner.

I found the original stone in 1980, my record states:

At the corner point: Set 1 $\frac{1}{2}$ "x30" galvanized iron pipe 26 inches in the ground with brass cap marked as shown. (marks shown below).

From which: I scribe NEW BEARING TREE:

A 6" Juniper bears N88°W, 190.0 feet, marked $\frac{1}{4}$ S20CSBT.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
G.J. Russell
S.D. Follweiler

RECEIVED AND
FILED
6-1-95
OFFICE OF COUNTY SURVEYOR
Robert D. Bagett
ATTEST: *Jeremy Russell*

REGISTERED
PROFESSIONAL
LAND SURVEYOR
Robert D. Bagett
OREGON
JULY 12, 1983
ROBERT D. BAGETT
598
Renewal Date 12/31/95

April 12, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a 1 $\frac{1}{2}$ " iron pipe with a 2 $\frac{1}{2}$ " Grant County Surveyor brass cap marked as shown below, set in a mound of stone.

A Juniper Stump 11" diam., bears N88°W, 190.0 ft. with partially healed blaze, scribe visible.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:
Show how trees are scribed and basis of bearings, including compass var.

The monument set in 1980 is in good condition.

MONUMENT MARKED

From which: I SET NEW REFERENCE POINTS:
A 5/8"x30" iron pin, bears N45°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1 1995 OPLS 598.
A 5/8"x30" iron pin, bears S52°E, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 2 1995 OPLS 598.
A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 3 1995 OPLS 598.
A 5/8"x30" iron pin, bears N52°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 4 1995 OPLS 598.
ALSO: A Pine 11"diam., bears N54°W, 257.4 ft. Tree is not scribed, we measured to the sidecenter of the root crown of the tree, this is the only pine tree within $\frac{1}{4}$ mile of the corner.

GRANT COUNTY
SURVEYOR
T13S R28E
 $\frac{1}{4}$
S20 | S21
1980
OPLS 598

Used mag. compass with 20°E var. and a steel tape.