


CORNER RESTORATION

SW Cor.
CORNER Sec. 4 **TWP** 13 S. **RANGE** 33 E.

ORIGINAL SURVEY BY: John B. David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

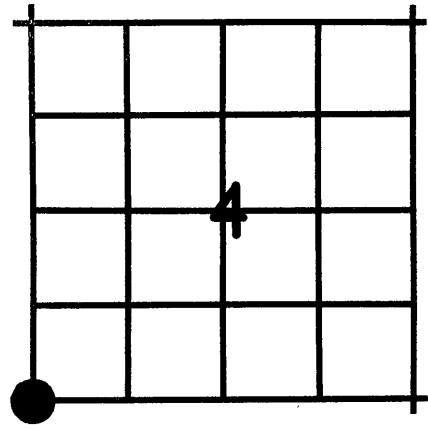

ORIGINAL DESCRIPTION:

Set Stone 18x10x8 for corner to sections 4, 5, 8, and 9.

RESTORATION BY, STAMP AND DATE:

R. D. Bagett
 J. L. Watson
 K. J. Workman

**RECEIVED AND
 FILED**

JAN 3 1989

OFFICE OF COUNTY SURVEYOR
 Attest: *[Signature]*

**REGISTERED
 PROFESSIONAL
 LAND SURVEYOR**

[Signature: Robert D. Bagett]

**OREGON
 JULY 12, 1963
 ROBERT D. BAGETT
 598**

December 8, 1988

Grant County Surveyor

EVIDENCE FOUND:

I found the original basalt stone 15x10x10 inches, marked with 3 grooves and 2 grooves at a rockjack at the corner of fence lines running North, East and West. I accept the position of this stone and fencecorner as the best available evidence of this corner. This position is harmoniously related to other found corners in this area.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the Corner Point: Set a 1½"x30" Galv. iron pipe 26" in the ground with attached brass cap marked as shown.

MONUMENT MARKED

From which I set NEW REFERENCE POINTS:

A 5/8"x30" iron pin, driven flush with the ground, bears N. 45° E., 30.00 ft., with attached 1½" Alum Cap, marked Grant County Surveyor RP1 1988.

A 5/8"x30" iron pin, driven flush with the ground, bears S. 45° E., 30.00 ft., with attached 1½" Alum Cap, marked Grant County Surveyor RP2 1988.

A 5/8"x30" iron pin, driven flush with the ground, bears S. 45° W., 30.00 ft., with attached 1½" Alum Cap, marked Grant County Surveyor RP3 1988.

A 5/8"x30" iron pin, driven flush with the ground, bears N. 45° W., 30.00 ft., with attached 1½" Alum Cap, marked Grant County Surveyor RP4 1988.

Buried marked stone South and alongside iron pipe. Surrounded pipe with mound of stone 3 foot base to top of cap.

Used magnetic compass with 20° E. variation and steel tape for measurements to references. No bearing trees or bearing objects were available.

