


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Line tree established by William E. Campbell,
Deputy Surveyor, under G.L.O. Contract No. 652,
dated April 27, 1896.

Surveyor General's records state:

N.0°2'W., bet. Secs. 15 and 16
29.58 A Yellow Pine, 15 in. diam., on line, I
mark with 2 notches on N. and S. sides

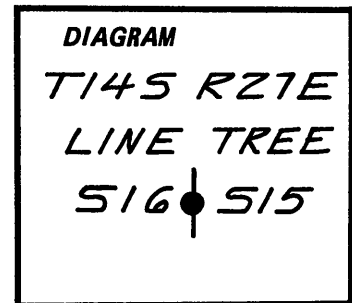

L/M-13
F.B.2 Pg.23,24

Description of corner evidence found:

At assumed line tree location found a 28" Ponderosa Pine, good
condition, marked with healed notches or blazes on North and
South sides, tree has been remarked about 25 years ago. No
other Pine stumps or live trees within 20 feet of this tree and
tree location very close to record position.


Description of monument and accessories I established to perpetuate the
original location of this corner:

Painted red band around line tree and nailed
property boundary sign 54-2 on West face and
attention sign 54-4 on East face.
Marked bearing trees:
An 8" Ponderosa Pine bears North 26-1/4° East,
57.3 ft., scribed-APS15BT;
A 9" Ponderosa Pine bears North 76-1/4° West,
28.8 ft., scribed-APS16BT.
Set steel post 5 feet North with sign 54-2 and
sign 54-4 facing line tree. Set steel post
5 feet South with sign 54-2. Painted red band
and faces red and nailed signs 54-3 and 54-4
to BT's. Nailed brass washer stamped- AS&E
LS1026 -to face of BT's.


M.V.19-1/2°E.

I hereby certify that the above line tree was re-
established as herein described on October 21, 1986.

Witnesses: David B. Armstrong
Shelby H. Griggs



David B. Armstrong



Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*17* day of.....*JAN*....., 19..*87*..
.....*Robert D. Baggett*..... by.....
(COUNTY OFFICIAL) (DEPUTY)