

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


T15S R25

History of original corner establishment:

Corner established by E. Thatcher under Contract No. 268 dated 7-19-1877.

Surveyor General's Record states:

Begin at Standard Corner to Township 15 South, Ranges 25 and 26 East, North on Range line on East boundary of Section 36, 69.75 chains, a ravine S70° West, 80.00 chains. Set stone 24x14x10 for corner to Sections 25, 36, 30 and 31. Raised stone mound at corner, thence S89° 56' West on true line between Sections 25 and 36, 40.24 chains set 1/4 corner (not found), 49.4 chains, a creek 18 links wide runs S25° West.

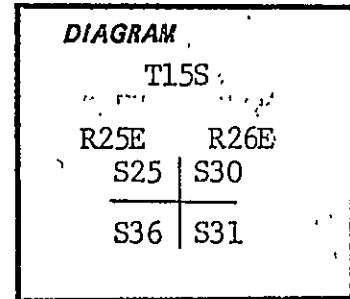


Description of corner evidence found:

Found 24x16x8" firmly set stone marked with 1 by 6 notches at the base of a North-South-West fence corner. Corner position approximately agrees with G.L.O. measurements to a ravine 10.25 chains (677 feet) South and a creek 49.4 chains (3260 feet) West.

Description of monument and accessories established to perpetuate the original location of this corner: Declination, 19° East.

At corner position I set a 2" x 30" aluminum pipe with 3 1/4" cap stamped as shown 0.9 feet in rocky soil. Stone buried adjacent to and East of monument. 3' x 1.6' rock and soil mound was raised to monument's top.

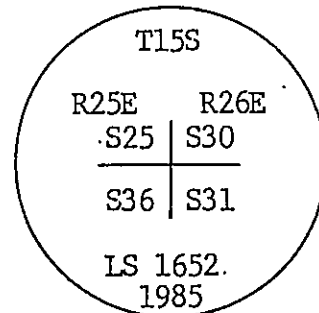

Accessories taken:

- A Juniper 4" in diameter bears N74° West 124.0 feet scribed T15S R25E S25 BT.
- A Juniper 9" in diameter bears N32° East 50.7 feet scribed T15S R26E S30 BT.
- A Ponderosa Pine 7" in diameter bears S43-3/4° East 40.9 feet scribed T15S R26E S31 BT.
- A Juniper 10" in diameter bears S36° West 163.8 feet scribed T15S R25E S36 BT.

To new bearing trees a 3/4" brass washer stamped PLS 1652 was nailed into the BT blaze. USFS sign 54-9 was attached to a metal fence post 5 feet West of corner and to the back of all bearing trees.

A bearing tree tag marked with reference information was nailed above all BT blazes. A 6" red band was painted on a smoothed bark surface above all BT tags.

I hereby certify that the above corner monument was set as herein described on 10/9/1985.

REGISTERED PROFESSIONAL LAND SURVEYOR

*Robert R. Povey*

OREGON  
JULY 14, 1978  
ROBERT R. POVEY  
1652

Office of... COUNTY SURVEYOR County of... CROOK State of... OREGON... I hereby certify that the within instrument was filed in this office for record on the 17<sup>TH</sup> day of... DECEMBER, 19... 85  
*David B. Armstrong*  
(COUNTY OFFICIAL)

RECEIVED AND FILED

DEC 31 1993

OFFICE OF COUNTY SURVEYOR  
*Robert R. Povey*