


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established under joint contract #357, dated July 2, 1880 by S. W. Lackland, interiors, and Bamford Robb, exteriors.

Surveyor General's record state: Set post. From which; a pine 16" in diameter bears N 12° E, 55 links a pine 18" in diameter bears N 20° W, 45 links a pine 36" in diameter bears S 08° E, 29 links a pine 16" in diameter bears S 40° W, 44 links

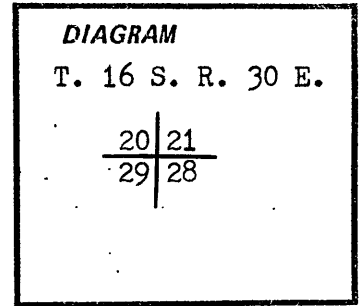

Description of corner evidence found:

Found remains of old scribed post in small mound. Found: 22" Ponderosa Pine N 11 E, 45.8 ft., scribed "S 21 T 16 R 30 BT" 8" burnt stump N 20° W, 30.7 ft., no scribing visible. 19" Ponderosa Pine snag, S 40° W, 29.0 ft., scribed "S29 T16 R30 BT" Ponderosa Pine snag, S 28 1/2° E, 21.4 ft., scribed "S28 T16 R30 BT"

Description of monument and accessories established to perpetuate the

original location of this corner: Set corner from original bearings to NE BT, NW BT, and SW BT, and distance to SW BT. At corner position I set a 1 1/2" x 30" aluminum pipe with 3/4" aluminum cap, 24" in ground. Marked;

Bearing trees

a Ponderosa Pine, 8" in diameter, bears N 22° W, 64.5 ft., scribed "T 16 S R 30 E S20" in upper blaze and "BT" and brass washer stamped RLS 1664 in lower blaze.



a Ponderosa Pine, 13" in diameter, bears S 88° E, 7.5 ft., scribed "T 16 S R 30 E S28" in upper blaze and "BT" and brass washer stamped RLS 1664 in lower blaze.

a ponderosa pine, 13", in diameter, bears S 14° W, 45.3 ft., scribed "T 16 S R 30 E S29" in upper blaze and "BT" and brass washer stamped RLS 1664 in lower blaze.


Compass declination 19° East

I certify the above corner location was perpetuated as herein described in December 1980.

Terry Butler, Witness

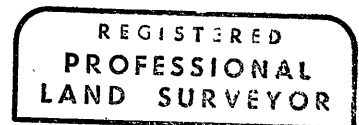

Carl E. Sundet

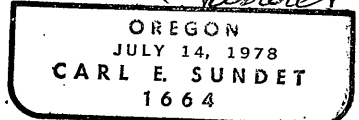

Office of Surveyor County of Grant State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 13 day of Feb, 1981. Robert D. Baggett by (COUNTY OFFICIAL) (DEPUTY)