


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:  
Corner not previously established.



No record of subsequent monumentation found in Grant County survey records.

Description of corner evidence found:  
Corner not previously established.  
See map of survey 1149 dated June, 1990.

Description of monument and accessories I established to perpetuate the  
original location of this corner: At position determined by survey, I set a 2½" x 30" aluminum  
pipe with aluminum cap marked as shown, 20 inches in the ground, from which:



New BTs:  
A 6 inch diameter Ponderosa Pine bears S61°E, 103.50 feet marked X BT.  
A 6 inch diameter Ponderosa Pine bears S18°W, 92.25 feet marked C W 1/16 S 19 BT.

Set a steel fencepost approximately 5 feet North with  
land survey monument sign attached.

Raised a mound of stone around monument, 3 ft. base to top of cap.

I hereby certify that the above corner point was  
perpetuated as hereon described on June 6, 1990.

Witnesses:  
Jeff Petersen

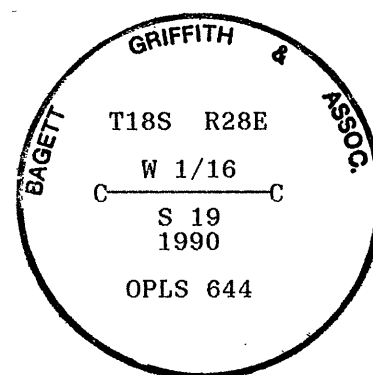

I used a steel tape and magnetic compass in the  
establishment of new accessories. I used 18°  
East magnetic declination and the distances are  
to a 50d spike driven in the right side of the  
root crown. I attached a brass washer marked  
OPLS 644 to the BT blaze.

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 17 day of July, 1990  
Robert D. Baggett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)