


CERTIFIED RECORD OF LAND CORNER MONUMENTATION
C1/4 corner of Section 6, T9S, R27E, W.M.

History of original corner establishment:
Corner not previously established



Description of corner evidence found:
NONE

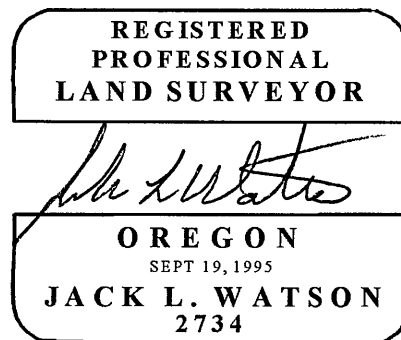

Renewal Date 6/30/2008

Description of monument and accessories set at corner location:

Set a 5/8"x30" iron pin with attached 2" aluminum cap, surrounded by a mound of stone. The cap is stamped as shown in the diagram.

From which:

- A 14" Juniper bears N61°E, 13.0 ft., marked C1/4S6BT.
- A 13" Juniper bears S83°E, 20.3 ft., marked C1/4S6BT.
- A 21" Juniper bears S24°E, 30.1 ft., marked C1/4S6BT.
- A 5/8"x30" iron pin bears N68°W, 37.90 feet, with attached red plastic cap marked CORNERSTONE SURVEYING INC.

I used a steel tape measuring to a 50d nail driven in the side center at the root crown of the BT's and magnetic compass, with 18° E. declination. See Grant County Survey No. 1839.

Date: April 1, 2008

Office of SURVEYOR County of GRANT
State of OREGON I hereby certify that the within instrument was filed in this office
for record on the 7 day of APRIL, 2008.
Robert D. Sayer by _____
(COUNTY OFFICIAL) (DEPUTY)