


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

A-07

History of original corner establishment:

1883, Frank W. Campbell, U.S. Deputy Surveyor, established the corner while surveying the township line under G.L.O. Contract No. 468. He set a Post 3' long by 3" square, 24" in the ground, from which;
10" Tamarack, N. 45° E., 14 links.
11" Tamarack, S. 40° E., 20 links.


1994, Dennis L. Gaylord, Registered Land Surveyor No. 1636, found the original NE BT and set at record bearing and distance, a 2 1/2" by 30" aluminum pipe, with 3 1/4" aluminum cap, 25" in the ground surrounded by a small mound of stones, from which;
14" Western Larch, N. 45° E., 9.24 feet, with healed blaze, chopped open to scribing (original BT).
New BT's;
10" Western Larch, S. 62° E., 23.1 feet.
15" Western Larch, N. 24° E., 45.3 feet.
14" Western Larch, N. 27°15' W., 28.9 feet.
24" White Fir, S. 20°30' W., 53.9 feet.

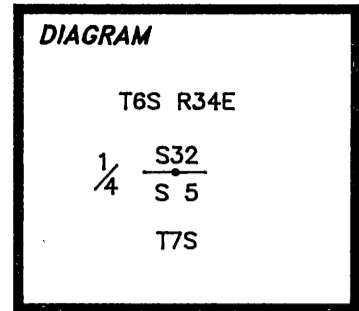

Description of corner evidence found:

FOUND A 2 1/2" ALUMINUM PIPE, WITH A 3 1/4" ALUMINUM CAP, PROJECTING 5" OUT OF THE GROUND SURROUNDED BY A SMALL STONE MOUND, MARKED AS SHOWN, FROM WHICH:

15" WESTERN LARCH, N 24° E, 45.3 FEET, WITH SCRIBING VISIBLE ON DOUBLE BLAZE AND 3/4" BRASS WASHER STAMPED "PLS 1636" NAILED TO THE LOWER BLAZE.
14" WESTERN LARCH, N 45° E, 9.2 FEET, WITH SCRIBING VISIBLE ON CHOPPED OPEN BLAZE (ORIGINAL BT).
10" WESTERN LARCH, S 62° E, 23.1 FEET, WITH SCRIBING VISIBLE ON DOUBLE BLAZE AND 3/4" BRASS WASHER STAMPED "PLS 1636" NAILED TO LOWER BLAZE.
24" WHITE FIR, S 20 1/2° W, 53.9 FEET, WITH SCRIBING VISIBLE ON DOUBLE BLAZE AND 3/4" BRASS WASHER STAMPED "PLS 1636" NAILED TO LOWER BLAZE.
14" WESTERN LARCH, N 27 1/4° W, 28.9 FEET, WITH SCRIBING VISIBLE ON DOUBLE BLAZE AND 3/4" BRASS WASHER STAMPED "PLS 1636" NAILED TO LOWER BLAZE.

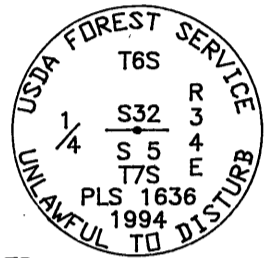

Description of monument and accessories I established to perpetuate the original location of this corner:

GEOGRAPHIC POSITION
DATUM: NAD83(1991) OREGON HIGH PRECISION NETWORK
LATITUDE: 44°59'50.56198" North
LONGITUDE: 118°38'49.10373" West
ELLIPSOID HEIGHT: 1706.394 meters

MAGNETIC DECLINATION: 19° EAST

WORK PERFORMED BY: DAVID A. SCHLAICH (RLS 2308)
DATE: SEPTEMBER, 1997

REGISTERED PROFESSIONAL LAND SURVEYOR

David A. Schlaich

OREGON JULY 16, 1987 DAVID A. SCHLAICH 2308

RENEWS 06/30/98

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office for record on the 13 day of Nov, 1997
Robert D. Baggett by (COUNTY OFFICIAL) (DEPUTY)

Form R6-7100-57 (9/71)

SEE MAP OF SURVEY NO. 1458

A-7