


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

P-21

**History of original corner establishment:**

1884, HERMAN D. GRADON, UNDER CONTRACT NO. 499, ESTABLISHED THE CORNER. HE SET A POST 3" LONG AND 3" SQUARE, 24" IN THE GROUND, MARKED "1/4S" ON THE WEST FACE, FROM WHICH:  
4" PINE, BEARS S. 42° E., 10 LINKS.  
6" PINE, BEARS S. 16° W., 19 LINKS.

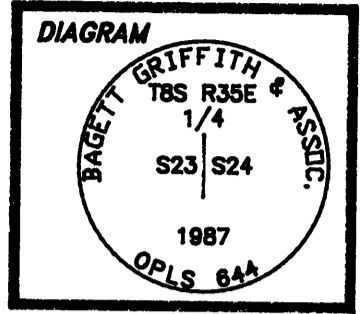

1987, DUANE I GRIFFITH, OPLS 644, IN GRANT COUNTY SURVEY NO. 1019, AFTER FINDING NO EVIDENCE OF THE ORIGINAL CORNER SET BY PROPORTION A 2 1/2" BY 30" ALUMINUM PIPE, WITH ALUMINUM CAP, 26" IN THE GROUND AND RAISED A MOUND OF STONE AROUND THE MONUMENT 2' BASE TO TOP OF THE CAP, FROM WHICH:  
30" WESTERN LARCH, BEARS N. 25° E., 55.31 FEET.  
22" WESTERN LARCH, BEARS N. 34° W., 36.85 FEET.

**Description of corner evidence found:**

FOUND A 2 1/2" ALUMINUM PIPE, WITH 2 1/2" ALUMINUM CAP, PROJECTING 1" OUT OF THE GROUND SURROUNDED BY A RING OF STONE, MARKED AS SHOWN (SEE DIAGRAM), FROM WHICH:

29" WESTERN LARCH, N. 27 1/4° E., 54.8 FEET, SCRIBED "1/4 S24" "BT" ON DOUBLE BLAZE WITH 3/4" BRASS WASHER MARKED "OPLS 644" NAILED NEAR THE "BT" SCRIBING ON THE LOWER BLAZE.  
22" DEAD WESTERN LARCH, N. 33° W., 36.7 FEET, SCRIBED "1/4 S23" "BT" ON DOUBLE BLAZE WITH 3/4" BRASS WASHER MARKED "OPLS 644" NAILED NEAR THE "BT" SCRIBING ON THE LOWER BLAZE.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

MARKED NEW BT'S:  
7" LODGEPOLE PINE, S. 88 1/2° E., 5.4 FEET, MARKED "1/4 S24" "BT".  
7" GRAND FIR, S. 69 1/4° W., 7.4 FEET, MARKED "1/4 S23" "BT".  
8" LODGEPOLE PINE, N. 33 1/4° W., 8.1 FEET, MARKED "1/4 S23" "BT".

NAD83(1991)  
LATITUDE: 44°51'27.52341" NORTH  
LONGITUDE: 118°27'18.12946" WEST

NOTE: THE BEARING TREES ARE DOUBLE BLAZED AND HAVE A 3/4" BRASS WASHER STAMPED "RLS 2308" NAILED TO THE LOWER BLAZE BETWEEN THE "BT" SCRIBING. THE DISTANCE TO THE BEARING TREES WAS MEASURED AT SIDE CENTER ONE FOOT ABOVE THE ROOT CROWN. THE BEARINGS WERE DETERMINED USING THE TOPCON GTS-4 IN CONJUNCTION WITH THE SURVEY TRAVERSE.

MAGNETIC DECLINATION: 18°30' EAST

WORKED PERFORMED BY: DAVID A. SCHLAICH  
DATE: JULY 20, 1995

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*David A. Schlaich*

OREGON  
JULY 16, 1987  
DAVID A. SCHLAICH  
2308

RENEWS 06/30/96

Office of SURVEYOR County of GRANT  
State of OREGON I hereby certify that the within instrument was filed in this office  
for record on the 1st day of SEPTEMBER 1995  
Robert D. Burch by David A. Schlaich  
(COUNTY OFFICIAL) (DEPUTY)