


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

P-21.48

History of original corner establishment:

NONE

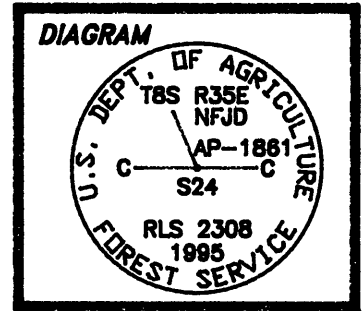

Description of corner evidence found:

NONE

Description of monument and accessories established to perpetuate the original location of this corner:

SET IN THE CENTER OF WEST TENCENT CREEK, ON THE EAST-WEST CENTERLINE OF SECTION 24, T. 8 S., R. 35 E., A 5/8" BY 36" LONG REBAR, WITH 3 1/4" ALUMINUM CAP, 33" IN THE GROUND, MARKED AS SHOWN (SEE DIAGRAM), FROM WHICH:

22" WESTERN LARCH, S. 34 1/4" W., 16.2 FEET, SCRIBED "WB/1861" "BT".
18" ENGLEMAN SPRUCE, N. 79 1/4" W., 6.9 FEET, SCRIBED "WB/1861" "BT".

NAD83(1991)
LATITUDE: 44°51'27.44959" NORTH
LONGITUDE: 118°27'09.33391" WEST


NOTE: THE BEARING TREES ARE DOUBLE BLAZED AND HAVE A 3/4" BRASS WASHER STAMPED "RLS 2308" NAILED TO THE LOWER BLAZE BETWEEN THE "BT" SCRIBING. THE DISTANCE TO THE BEARING TREES WAS MEASURED AT SIDE CENTER ONE FOOT ABOVE THE ROOT CROWN. THE BEARINGS WERE DETERMINED USING THE TOPCON GTS-4 IN CONJUNCTION WITH THE SURVEY TRAVERSE.

MAGNETIC DECLINATION: 18°30' EAST

WORKED PERFORMED BY: DAVID A. SCHLAICH
WITNESSED BY: RACHELLE (SHELLEY) FLETCHER
DATE: JULY 18, 1995



David A. Schlaich

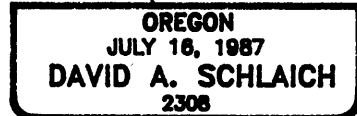

RENEWS 06/30/96

Office of SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 1st day of SEPTEMBER 1995
Robert D. Baggett by.....
(COUNTY OFFICIAL) (DEPUTY)