


CORNER RESTORATION

CORNER NW12 TWP 10S RANGE 32E

ORIGINAL SURVEY BY: Unknown
 CONTRACT NUMBER: Unknown
 CONTRACT DATE: Unknown

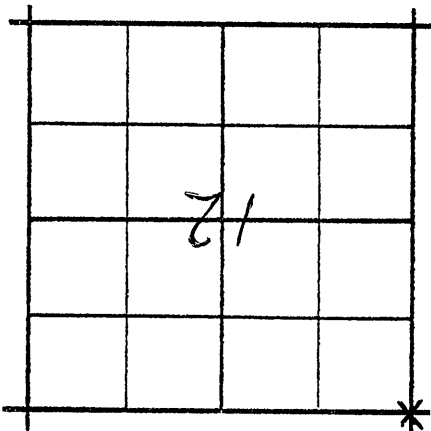

ORIGINAL DESCRIPTION:

Set stone 10"x12"x5" from which:
 A 30" pine bears N65W, 70 links
 A 15" pine bears N83E, 50 links
 A 16" pine bears S18E, 18 links
 A 36" pine bears S40W, 110 links
 Found by Howard E. Taylor, Oregon R.P.E. #2891, in 1958.
 Mr. Taylor set a stone 22"x12"x6".
 Recorded in Malheur National Forest Office, John Day, Oregon.

RESTORATION BY, STAMP AND DATE:

REGISTERED
OREGON
 LAND SURVEYOR

Howard E. Taylor

JULY 10, 1964
 DUANE I. GRIFFITH
 644

Dec. 9 1969


EVIDENCE FOUND:

Found stone 22"x12"x6", from which:
 A burned pine, 30"±, bears N65W, 46.6 feet, dead and down.
 A 22" pine bears N83E, 33feet, dead and down.
 A 20" pine snag bears S18E, 12 feet, dead.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.
 Set 1 1/2"x30" iron post with brass cap 20" in ground, from which:
 A pine 9" dia. bears N15E, 34.6 feet
 mkd. T10SR32ES1 BT
 A pine 7" dia. bears S34E, 96.4 feet
 mkd. T10SR32ES12BT
 A pine 10" dia. bears S19W, 46.2 feet
 mkd. T10SR32ES11BT
 A pine 6" dia. bears N21W, 48.5 feet
 mkd. T10SR32ES2 BT

GRANT COUNTY SURVEYOR
 MONUMENT MARKED

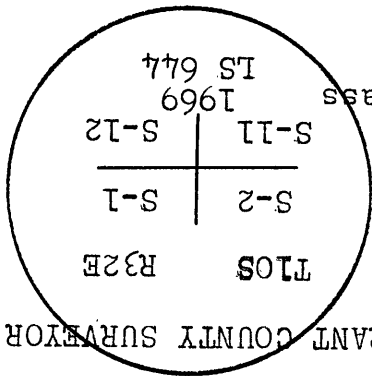

Complete and file with Office of the Grant Steel tape and compass
 County Surveyor, Grant County, Oregon,
 Courthouse, Canyon City, Oregon 97820

* SEE PARSONS 2/89