

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
New corner

*

DIAGRAM
T10S R33E
C1/4
+
S17

Description of corner evidence found:

Description of monument and accessories I establish to perpetuate the original location of this corner:

Set a 2-1/2x30" aluminum monument 22" in the ground in a mound of stone.

T10S R33E
C1/4

New bearing trees:

+

An 11" Fir bears N29°20'E 31.8ft scribed C1/4S17BT.

S17

A 16" Fir bears S25°05'W 43.2ft scribed C1/4S17BT.

PLS1918
1989

Sun Cadastral Survey

Contract No.: 53-04H1-7-4011

Project No.: 8722LA


Field Book: 7-50

Work Accomplished: 5/9/89

Witnesses: Louise Parsons

New BTs have 3/4" brass washers marked PLS1918 attached to the BT blaze, faces and bands painted with red tree marking paint, and BT tags and Attention or Land Survey Monument signs. A steel fence post with Attention or Land Survey Monument sign is driven approximately 3-5 feet from the corner.

PARSONS SURVEYING
1915 S.E. Stone Street
Corvallis, OR 97333
(503) 752-7515

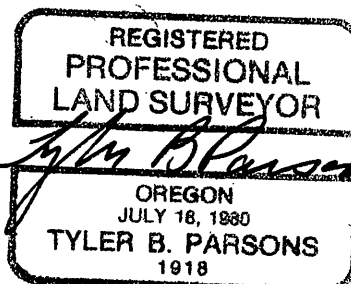

Office of COUNTY SURVEYOR

County of GRANT

State of OREGON

, I hereby certify that the within instrument was filed in this office for record on the 10 day of Aug, 1989

Robert D. Sayers
(COUNTY OFFICIAL)

by _____

(DEPUTY)