

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:
New Corner

*

DIAGRAM
T10S
R32E R33E
S1/16
S13/S18

Description of corner evidence found:

Description of monument and accessories I establish to perpetuate the original location of this corner:

Set a 2-1/2x30" aluminum monument 22" in the ground.

New bearing trees:

A 12" P.Pine bears S86°52'E 35.8ft scribed S1/16S18BT.


An 8" P.Pine bears S52°30'W 26.6ft scribed S1/16S13BT.

T10S
R32E R33E
S1/16
S13/S18
PLS1918
1989

Sun Cadastral Survey
Contract No.: 53-04H1-7-4011
Project No.: 8722LA
Field Book: 7-50
Work Accomplished: 5/9/89
Witnesses: Louise Parsons

New BTs have 3/4" brass washers marked PLS1918 attached to the BT blaze, faces and bands painted with red tree marking paint, and BT tags and Attention or Land Survey Monument signs. A steel fence post with Attention or Land Survey Monument sign is driven approximately 3-5 feet from the corner.

PARSONS SURVEYING
1915 S.E. Stone Street
Corvallis, OR 97333
(503) 752-7515

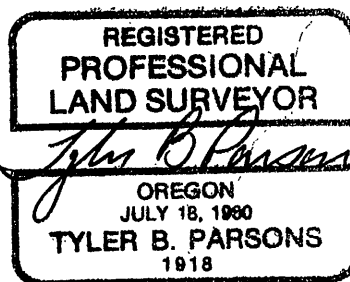

Office of COUNTY SURVEYOR County of GRANT
State of OREGON, I hereby certify that the within instrument was filed in this office
for record on the 10 day of Aug, 1989

Robert D. Bagen by _____
(COUNTY OFFICIAL) (DEPUTY)