


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Index File No. E-13

History of original corner establishment:


Corner was originally established by Herman D. Gradon under GLO contract No. 416 during October, 1881. Surveyors General's notes state: "Set a basalt stone 14x8x6 ins. 9 ins. in the ground for cor. to secs. 3, 4, 9 and 10 marked with 5 notches on S. and 3 notches on E edges; from which: A fir 18 ins. diam. bears N50°E, 21 lks. dist. marked T10SR35ES3 BT. A fir 28 ins. diam. bears S45°E, 44 lks. dist. marked T10SR35ES10 BT. A fir 8 ins. diam. bears S30°W, 47 lks. dist. marked: T10SR35ES9 BT. A tamarack 24 ins. diam. bears N35°W, 9 lks. dist. marked T10SR35ES4 BT."



Description of corner evidence found:

Found 16x11x8 inch stone firmly set on East side of mound of stone and clearly marked with 5 notches on south and 3 notches on east sides from which: A 42" fir snag bears S72°E, 29.1 ft. with full scribe. A broken and rotten tamarac is in the NW quad with some scribing. No trace of other BTs.

Description of monument and accessories I established to perpetuate the original location of this corner:




At the center of the above stone set 2 1/2" X 30" galvanized pipe and brass cap marked: Set pipe 24" in the ground and mound of stone around to cap. Placed marked stone at base. From which by magnetic declination of N20°E: A 15" fir bears N34°E, 38.5 ft. scribed T10SR35ES3 BT. A 9" lodgepole pine bears S89°E, 38.9 ft. scribed T10SR35ES10 BT. A 15" fir bears S40°W, 52.7 ft. scribed T10SR35ES9 BT. A 12" tamarac bears N57°W, 26.2 ft. scribed T10SR35ES4 BT. Painted blazes red and 6" red band around. Placed 54-3s, 54-4s and brass washers stamped PLS 1051 on BTs. Old BTs are tagged. Placed 54-4 on steel fence post 5' east of the corner.

I hereby certify that the above corner monument was reestablished as herein described.

Witnesses: Daniel Rowland
Doug Moser

October 22, 1980

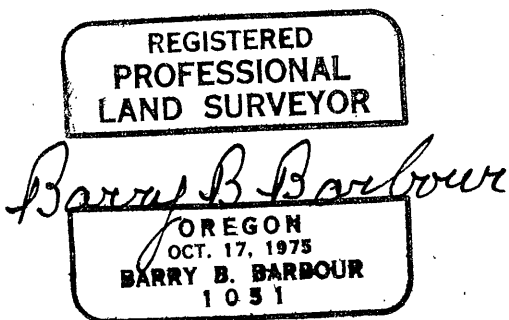

Office of..... County Surveyor..... County of..... Grant.....
 State of..... Oregon....., I hereby certify that the within instrument was filed in this office
 for record on the..... 23rd day of..... January....., 1981.
 by
 (COUNTY OFFICIAL) (DEPUTY)