

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1881 by, S.W. Lackland, Under General L
Land Office Contract No. 415. Surveyor Generals Notes State:
Set basalt stone 18x10x8 in. 12in. in ground for $\frac{1}{4}$ section
corner, marked $\frac{1}{4}$ on N. face.

From Which:

A Pine 20 in. dia. bears N24°E, 39 lks. dist. marked $\frac{1}{4}$ S BT.
A Pine 22 in. dia. bears S26°E, 28 lks. dist. marked $\frac{1}{4}$ S BT.
In 1961 Howard E. Taylor, P.E. 2891 found original marked stone
18x10x8 in. original BT, 22" Pine (Notes S26°E) was actually
S44°E, 18.5 ft. in reasonably good condition with scribe, but fire
scar on uphill side. There is a big stone 36"x24"x12" directly under
scribe and 1 cut 6" high "X" on stone, directly under scribe on tree.
Original 20" Pine N24°E, 25.7 ft. now windfall, gone except for root.
Scribed (New BT's)
19" Pine N18°W, 38.5 ft. 10" Fir N88°E, 11.3 ft. Corner on steep rocky
East slope on upper edge of timber patch.

Description of corner evidence found:

Found a 14"x12"x10" stone set in the ground, with $\frac{1}{4}$ on East face.

From Which:


Found root-wad with blaze, may have moved, bears N37°W, 30.2 ft.
Found trees as scribed by P.E. 2891. A Pine with scribing reads $\frac{1}{4}$
BT, bears N17°W, 39.0 ft. A Fir 12" dia. with grown over blaze bears
S86°E, 11.7 ft. Accepted position of the stone as $\frac{1}{4}$ corner.

**Description of monument and accessories established to perpetuate the
original location of this corner:**

Set a 30"x2" aluminum pipe with a 3 $\frac{1}{2}$ " aluminum cap, stamped as shown in diagram.
Set 24" in ground & set original stone West alongside pipe.

From Which:

A Fir 8" dia. bears N7°E, 23.2 ft. scribed $\frac{1}{4}$ S22 BT.
A Fir 11" dia. bears S32°E, 36.9 ft. scribed " S27 BT.
Nailed brass washers stamped PLS848, bearing tree & warning signs to each tree.
Set steel post with warning sign, North 1.5 ft. from corner.

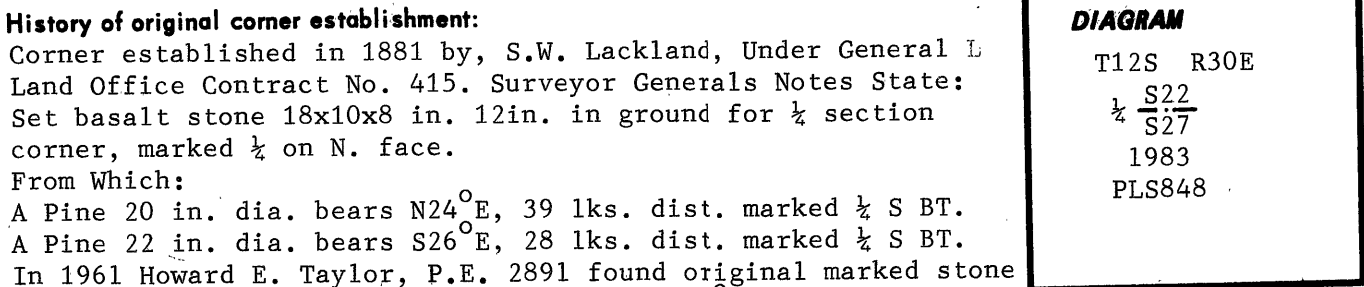

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Douglas M. Ferguson
OREGON
JULY 12, 1968
DOUGLAS M. FERGUSON
848

Corner monumented 5-4-83

Witnessed by Dave Herburger

Office of.....Surveyor..... County of.....Grant.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 29th day of.....August....., 1983.
Robert D. Beyer
(COUNTY OFFICIAL) (DEPUTY)