


CORNER RESTORATION

CORNER $N\frac{1}{4}$ cor. Sec. 35 TWP 13 S., RANGE 31 E., W.M.

ORIGINAL SURVEY BY: Thompson, Pengra, & David

CONTRACT NUMBER: 131

CONTRACT DATE: June 8, 1869

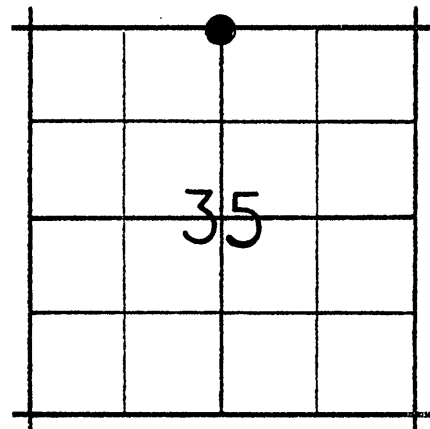

ORIGINAL DESCRIPTION:

S $89^{\circ}50'W$ on a true line between secs. 26 & 35.

25.10 Canyon Creek 10 lks. wide, runs North.

40.05 Set stone $24 \times 15 \times 6$ for $\frac{1}{4}$ sec. cor.

RECEIVED AND
FILED

APR - 2 1975

JOHN LIVEIRA, County Clerk

By *Betty Lowery* Deputy

RESTORATION BY, STAMP AND DATE:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Baggett

OREGON
JULY 12, 1963
ROBERT D. BAGETT
598

March 7, 1975

Grant County Surveyor

EVIDENCE FOUND: I found a stone $21 \times 10 \times 8$ inches marked $\frac{1}{4}$ on N. face, loosely set in a mound of stone. I have known of this stone in this position for about 5 years. After carefully studying the records, retracing survey lines, and considering the affidavit signed by Elton S. Saunders, PLS #405 (attached); I accept the position of this stone as the $\frac{1}{4}$ corner. The original call to Canyon Creek would fit if the creek hadn't been moved to the west side of the valley for the construction of the John Day - Burns highway. 14.95 chains east of this position is within 3 ft. of the highway centerline. Local residents claim that the creek did flow in about the area of the existing center of the highway.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: Set a $1\frac{1}{2} \times 30$ " iron pipe 26 " in the ground with brass cap marked as shown. FROM WHICH NEW BEARING TREES:

A pine, 9" diam., bears $N45^{\circ}E.$, 66.6 ft., marked $\frac{1}{4}$ S26 CSBT.

MONUMENT MARKED

A juniper 10" diam., bears East 54.4 ft., marked X CSBT.

The BLM brass cap denoting this same corner which was set in Survey No. 286 and is being contested bears $S59^{\circ}12'E.$, 113.10 ft.

The stone set by Jack Shaw, measuring $24 \times 18 \times 3$ inches and marked $\frac{1}{4}$ CS, bears $S74^{\circ}56'E.$, 20.85 ft.

Used T-2 theodolite and steel tape, bearings are based on solar Complete and File with Office of the Grant observation. Measured to County Surveyor, Grant County, Oregon, face of blaze on BTs. Courthouse, Canyon City, Oregon 97820

